

Our Ref: DJW: L.T2698.002.docx

29 April 2025
Brown Commercial Building Pty Ltd
PO Box 596
East Maitland NSW 2323
Attention: Caitlin O'Brien

Dear Caitlin

RE: FLOOD IMPACT ASSESSMENT FOR PROPOSED FLOOD MOUND AT 96 WOODBERRY ROAD, MILLERS FOREST NSW

Background

Torrent Consulting was engaged to undertake a Flood Impact Assessment to assist in the approvals process for the proposed flood mound at 96 Woodberry Road, Millers Forest, NSW (the Site). It is understood that a flood report will be expected by Maitland City Council.

This Site is located within the Hunter River floodplain, around 4 km south-west of the confluence of the Hunter and Williams Rivers, as presented in Figure 1. The topography of the local floodplain is flat and low-lying, characterised by raised flood levee embankments and earthen mounds, as presented in Figure 2.

The existing design flood conditions at the Site are detailed in the Williamtown – Salt Ash Floodplain Risk Management Study & Plan (BMT WBM, 2017). Information contained in this study was used to summarise the existing flood conditions and risks in the context of the Site and the proposed development. The assessment utilises a TUFLOW model of the Lower Hunter River to simulate design flood conditions consistent with those of the existing flood study. This model provides a platform to assess the potential flood impacts associated with the proposed mound. It also enables a more detailed understanding of the local flood velocities and hazards under both existing and proposed post-construction conditions.

A comprehensive cumulative impact assessment has previously been undertaken for recent mound assessments in the Hunter River floodplain, with several constraints identified for development within the floodplain. The proposed mound was assessed for compatibility with these constraints.

Model Development

For this assessment a TUFLOW hydraulic model was utilised that had been previously developed for mound assessments within the Hunter River floodplain. The model covers the entire floodplain of the Lower Hunter River downstream to the river mouth at the Tasman Sea, including upstream to Luskintyre on the Hunter River, Vacy on the Paterson River and Glen Martin on the Williams River, as presented in Figure 3.

The catchment area of the Hunter River covers some 22 000 km², with the Paterson and Williams Rivers contributing around 1200 km² and 1300 km² respectively. The modelled area encompasses some 750 km².

The model utilised the NSW Spatial Services LiDAR data product, downloaded via the ELVIS Foundation Spatial Data portal to define the floodplain topography. The model was constructed using a 16 m grid cell

resolution, with the sub-grid sampling (SGS) routine enabled to define model elevations from a 4 m resolution LiDAR DEM.

The modelled floodplain contains numerous embankments that function as hydraulic controls and are of too small a scale to be adequately captured by the 16 m grid cell model resolution. Therefore, a network of breaklines was digitised along some 820 km of embankments and the underlying LiDAR data interrogated to populate the breaklines with the elevations of the embankment crests. These were then incorporated into the TUFLOW model using the Z Shape representation, which modifies model cell elevations to match those of the breaklines.

A total of 27 floodplain mound constructions were identified as having been constructed since the LiDAR data was captured in 2012-13, using available aerial imagery in Google Earth. The approximate extent of these mounds was identified from the imagery and incorporated into the TUFLOW model with assumed mound heights being adopted to raise them above the 1% AEP flood level.

The Hunter River Hydrographic Survey (May 2005) was used to provide representative channel cross-section information of the lower Hunter, Paterson and Williams Rivers. An appropriate channel topography was incorporated into the model, with a full 2D representation of both channel and floodplain. Aerial imagery was used to define separate surface materials for areas of cleared floodplain, river channel and remnant vegetation. Modelling of key hydraulic structures within the study area is also included for the Fullerton Cove and Salt Ash floodgates and culverts under Nelson Bay Road.

Many estuarine vegetation communities are not well penetrated, and are subsequently poorly filtered in, the LiDAR data product. These include areas of mangroves, saltmarsh, phragmites, rank grassland, wet heath, and other swampy habitats. The modelled floodplain elevations in these areas have therefore had an elevation correction adjustment applied to the LiDAR data. Vegetation across the Hunter Estuary has been treated in the TUFLOW model, with LiDAR elevations being lowered between 0.2 m and 0.6 m, depending on vegetation cover. The extent of the modified LiDAR elevations is presented in Figure 3.

The upstream model inflow boundaries on the Hunter, Paterson and Williams Rivers were developed using information contained in the Hunter River Branxton to Green Rocks Flood Study (WMA Water, 2010), the Paterson River Flood Study Vacy to Hinton (WMA Water, 2017) and the Williams River Flood Study (BMT WBM, 2009) respectively. Local hydrological inputs for the 750 km² of model area were also accounted for, although they are not overly important for the derivation of the design flood conditions. The downstream boundary of the model was configured as a tidal cycle with a peak water level of 1.1 m AHD, which is approximately an annual peak condition.

The model was calibrated to provide consistency with the Hunter River Branxton to Green Rocks Flood Study and the Williamstown – Salt Ash Floodplain Risk Management Study through iterative adjustment of the Manning's 'n' roughness parameters for the digitised land use materials. The adopted Manning's 'n' values are provided in Table 1.

The TUFLOW model produced results at Maitland that closely match those of the Hunter River Branxton to Green Rocks Flood Study. Consistent results at Raymond Terrace were harder to achieve and were found to be significantly influenced by total inflow volumes more-so than peak flow rates alone.

Design flood levels at Oakhampton are driven principally by peak flows (with variations in volume effectively negligible). Flood Frequency Analysis (FFA) undertaken for the Hunter River Branxton to Green Rocks Flood Study and the Singleton Floodplain Risk Management Study (BMT, 2020) provide similar estimates

of design flood flows for the Hunter River, which provides a good level of confidence in those estimates. The derivation of design flood flow estimates through FFA at Raymond Terrace is less certain, due to a shorter period of continuous record and a lack of a site rating curve. Using FLIKE to derive probabilistic estimates of design peak flows, the results for the rarer events were found to vary significantly depending on the assumptions made for data entry of historic flood thresholds. This is because there is less than 40 years of continuous record and the largest flood events all occurred before this period.

Table 1 – Adopted Manning’s ‘n’ Values

| Surface Material | Manning’s ‘n’ |
|---|---------------|
| Cleared floodplain | 0.040 |
| Hunter River channel u/s Morpeth | 0.030 |
| Hunter River channel Morpeth to Raymond Terrace | 0.025 |
| Hunter River channel d/s Raymond Terrace | 0.020 |
| Paterson River channel | 0.045 |
| Williams River channel | 0.025 |
| Remnant vegetation | 0.120 |
| Mangroves | 0.150 |

Rainfall-runoff modelling was undertaken for the entire Hunter River catchment using methods outlined in ARR 2019 to assist in establishing suitable design flow conditions at Raymond Terrace, specifically the relationship between modelled peak flow conditions at Oakhampton and Raymond Terrace. With flows on the Hunter River dominating volumes at Raymond Terrace, establishing a relationship between design flows at Oakhampton and expected design flows at Raymond Terrace provides a useful tool for validating design flood levels at Raymond Terrace. The Hunter River catchment rainfall-runoff modelling found the critical duration at Oakhampton to be 48 hours, whereas it was the 72-hour duration at Raymond Terrace – indicative of the additional reliance on overall flood volume to maintain peak flows and levels. Table 2 presents the design flows at Oakhampton and the estimated equivalent design flow condition at Raymond Terrace.

Table 2 – Hunter River Design Peak Flows (m³/s)

| Design Event | Oakhampton | Raymond Terrace |
|--------------|------------|-----------------|
| 20% AEP | 1700 | 1400 |
| 10% AEP | 2600 | 2300 |
| 5% AEP | 3800 | 3200 |
| 2% AEP | 5800 | 4700 |
| 1% AEP | 8000 | 6300 |
| 0.5% AEP | 10 300 | 7900 |
| 0.2% AEP | 13 500 | 10 200 |

Ultimately, design flow estimates were adopted from the FLIKE FFA for the 20% AEP and 10% AEP events and from the rainfall-runoff modelling analysis for the rarer flood events. A comparison of the adopted design flows at Raymond Terrace with the 90% confidence interval determined using FLIKE is presented in Chart 1.

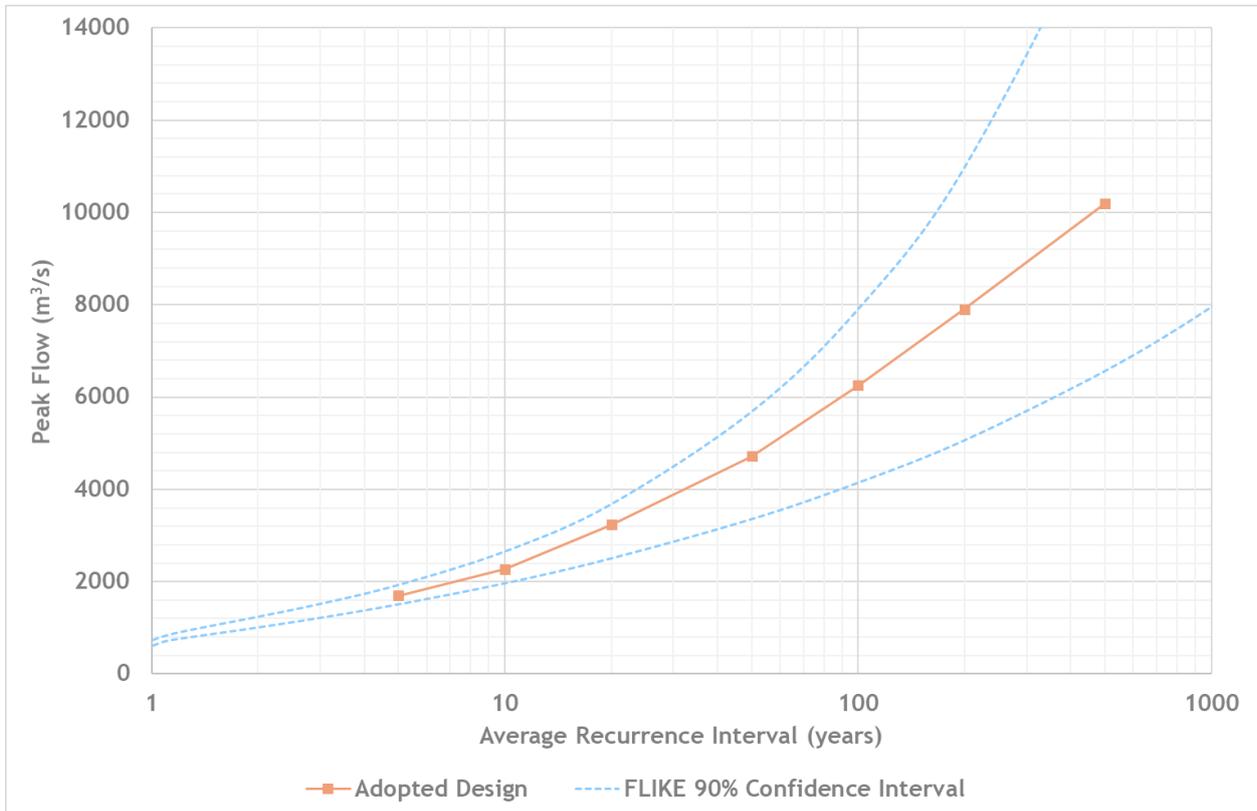


Chart 1 – Adopted Design Flood Flows at Raymond Terrace

Design flood flow hydrographs for the Hunter, Williams and Paterson Rivers were simulated in the TUFLOW model and the volumes of the flood recession were adjusted until the required peak flow conditions at Raymond Terrace were matched. The resultant peak flood levels at the Raymond Terrace gauge are presented in Table 3, together with those established for the Williamtown – Salt Ash Floodplain Risk Management Study. The overall consistency between the two is good and is well within the bounds of uncertainty of the FFA at Raymond Terrace.

Table 3 – Design Flood Levels at Raymond Terrace

| Design Event | This Assessment | BMT WBM (2017) |
|--------------|-----------------|----------------|
| 20% AEP | 2.6 | 2.2 |
| 10% AEP | 3.0 | 3.0 |
| 5% AEP | 3.4 | 3.3 |
| 2% AEP | 3.9 | 4.1 |
| 1% AEP | 4.6 | 4.8 |
| 0.5% AEP | 5.2 | 5.2 |

Flood Modelling and Mapping

The TUFLOW model was simulated (using the HPC solver) for the 20% AEP, 10% AEP, 5% AEP, 2% AEP, 1% AEP and 0.5% AEP events to define baseline flood conditions for the purposes of assessing flood risk and as the basis for subsequent flood impact assessment. The Extreme Flood event was also simulated. The modelled peak flood levels at the Site are summarised in Table 4.

The modelled peak flood extents for the 5% AEP, 1% AEP and Extreme events are presented in Figure 4, together with the Site lot boundary and proposed mound location. Figure 5, Figure 6, and Figure 7 are presented for additional flooding context and show the modelled peak flood depths for the 5% AEP, 1% AEP and Extreme events, respectively.

Table 4 – Modelled Peak Design Flood Levels

| Design Event | Flood Level (m AHD) |
|--------------|---------------------|
| 20% AEP | 1.6 |
| 10% AEP | 2.9 |
| 5% AEP | 3.4 |
| 2% AEP | 3.9 |
| 1% AEP | 4.5 |
| 0.5% AEP | 5.2 |
| Extreme | 8.4 |

The Hunter River model utilised for this assessment is generally consistent with the existing flood study, with mapping from the study indicating a flood level of around 4.6 m AHD at the Site for the 1% AEP event.

Flood Risk Management

The flood hazard conditions at the Site were assessed to determine the risk to property and risk to life exposure of the proposed development. Appropriate flood risk management measures were identified in accordance with Council's DCP, LEP, and the NSW Floodplain Development Manual.

Figure 8, Figure 9, and Figure 10 present the flood hazard classification at the Site for the 5% AEP, 1% AEP and Extreme Flood events, respectively. The flood hazards have been determined in accordance with Guideline 7-3 of the Australian Disaster Resilience Handbook 7 Managing the Floodplain: A Guide to Best Practice in Flood Risk Management in Australia (AIDR, 2017). This produces a six-tier hazard classification, based on modelled flood depths, velocities, and velocity-depth product. The hazard classes relate directly to the potential risk posed to people, vehicles, and buildings, as presented in Chart 2.

The flood hazard mapping is useful for providing context to the nature of the modelled flood risk and to identify potential constraints for the future development of the Site with regards to floodplain risk management. The principal consideration of good practice floodplain risk management is to ensure compatibility of the proposed development with the flood hazard of the land, including the risk to life and risk to property.

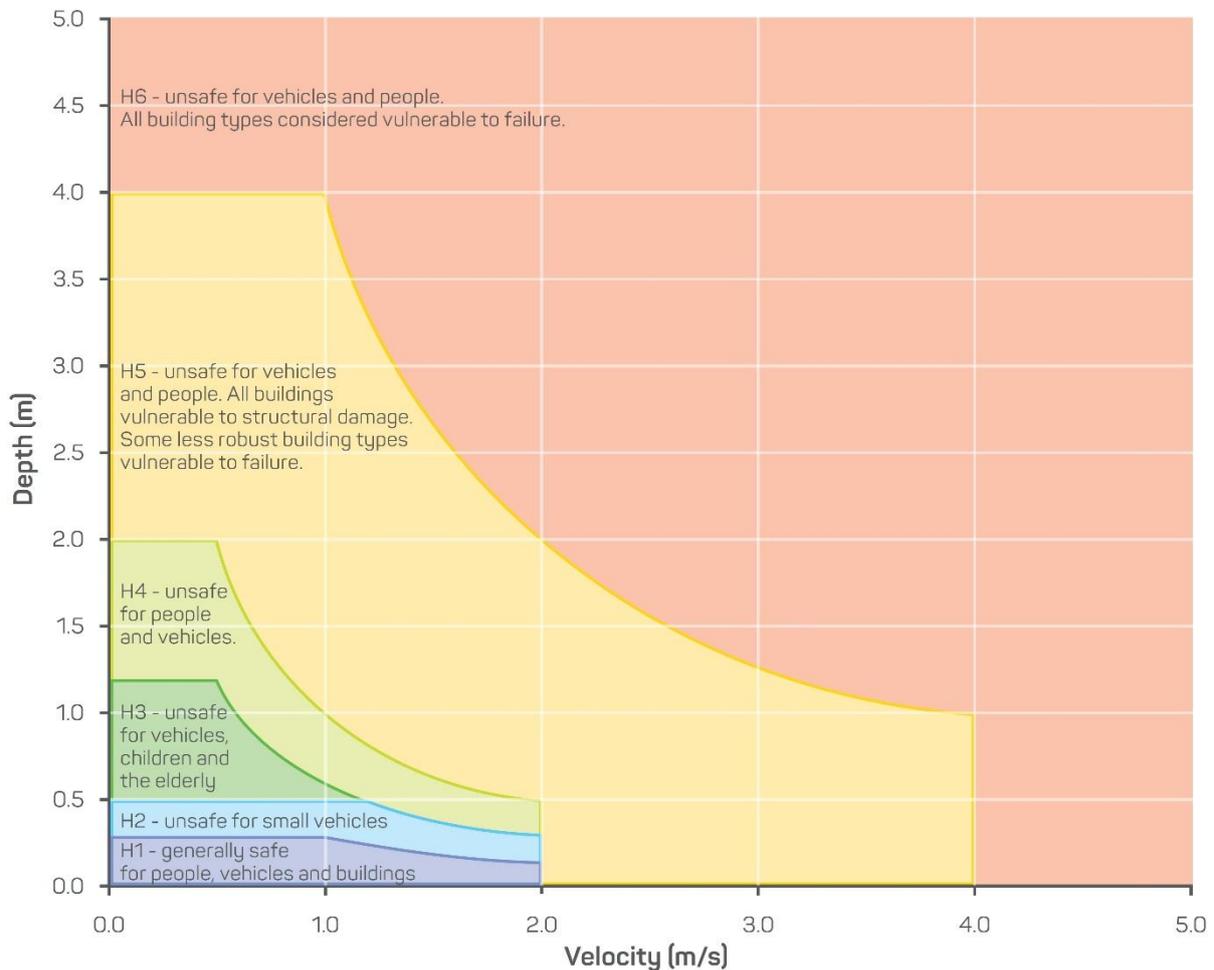


Chart 2 – General Flood Hazard Vulnerability Curves (AIDR, 2017)

The objective of the management of risk to property is to minimise the damages that would be incurred in the event of a flood. This includes potential damage to future building structures and their contents. Risk to property is typically managed to the 1% AEP design flood event.

The flood hazard mapping presented in Figure 9 shows that the Site constitutes almost entirely an H5 hazard at the 1% AEP event. This is principally depth-driven, as modelled velocities across the Site at the 1% AEP event do not exceed 0.4 m/s. Flood depths within the proposed mound extent are up to 3 m, therefore, providing a raised mound will reduce the flood depths within the mound extent, inherently mitigating the flood hazard and corresponding risk to property.

The objective of the management of risk to life is to minimise the likelihood of deaths in the event of a flood and is typically considered for rarer flood events than the 1% AEP, up to the PMF (or Extreme Flood). Figure 10 shows that the Site constitutes almost entirely an H6 hazard during an Extreme event, which would produce high hazard flood conditions on Site. However, as the proposal does not include any future dwelling the risk to life does not require further consideration in this assessment.

Flood Impact Assessment

The proposed mound extent was provided by Brown Commercial Building (BCP1075 R01.pdf), however, no finished level was proposed. The mound was incorporated into the TUFLOW model at a finished level of 5.0 m AHD to raise the mound above the 1% AEP floodplain, and the design flood events re-simulated. The results were then compared to the baseline conditions to identify potential flood impacts. Whilst extensive raising of embankments across the floodplain (e.g., the construction of linear infrastructure) can significantly impact the existing flooding regime, typically localised filling such as earthen mounds does not, unless sited at a sensitive location with high flood velocities.

The results of the flood impact assessment are presented in Figure 11 to Figure 16. Flood impact mapping is presented for the modelled peak flood level and modelled peak flood velocity for the 5% AEP, 1% AEP and 0.5% AEP flood events.

The results show there will be no tangible impacts to flood levels or flood velocities due to construction of the proposed mound for any of the modelled flood events.

Cumulative Development Assessment

Council has previously requested specific assessment of the potential for future cumulative development impacts of mound constructions within the floodplain for other developments. Therefore, it has also been considered as part of this assessment. The assessment of cumulative development across the floodplain of the Hunter River estuary is complex, due to the large area, jurisdiction of multiple LGAs and infinite possibilities of what future development might comprise. It is therefore important to undertake a robust analysis to ensure that development is neither unreasonably constrained nor unsustainable from a flood impact perspective.

A considerable effort has been invested in the cumulative impact assessment undertaken to support this individual development assessment. The scope of the assessment has been limited to the construction of earthen mounds in the Hunter (and Williams) River floodplain. The geographical extent initially comprised more than 800 Lots between Bolwarra, Seaham, and Woodberry. These were then filtered to further focus the assessment based on the following criteria:

- Lots smaller than 1.5 ha were excluded as having insufficient space to accommodate a mound
- Lots with at least 0.5 ha of flood-free land above the 1% AEP extent were excluded as not having the requirement for a mound
- Lots downstream of Green Rocks with an insufficient area of land with a 1% AEP velocity-depth product (VxD) below 1.4 were excluded as presenting an unreasonable cumulative development impact
- Lots upstream of Green Rocks with an insufficient area of land with a 1% AEP velocity-depth product (VxD) below 1.8 were excluded as presenting an unreasonable cumulative development impact

This process reduced the number of Lots assessed for the potential impacts of future cumulative development to a total of 306, as presented in Figure 17 and Figure 18. The mapping of areas with a 1% AEP VxD of greater than 1.4 for Lots downstream of Green Rocks and 1.8 for Lots upstream of Green Rocks is also provided for context. Through several iterations of initial flood impact modelling, the VxD thresholds were identified as being a constraint for development due to unreasonable flood impacts, compared to those resulting from the development of land below the corresponding 1% AEP VxD threshold.

The assessment of the cumulative impacts of potential future mound development was approached using several different methods for developing constraint criteria and for modelling the flood impacts. These methods were tested using a few current in-preparation DAs, being overhauled, and refined through many iterations. Reassuringly, the various methods employed all pointed towards a similar set of constraints for what was considered acceptable as a net cumulative development impact. The main outcome of the methodology iteration process was to not unreasonably constrain potential acceptable developments through ill-considered constraint criteria. It also served to ultimately produce a much simpler list of constraining criteria and associated modelling methodology.

The outcome of refining the cumulative development assessment has resulted in the following criteria limiting development potential within the 306 Lots considered in the assessment:

- each Lot can accommodate a single mound development (or combination of multiple smaller mounds) totalling up to 10% of the Lot area, capped at a maximum of 1.3 ha per Lot,
- mound footprints constructed downstream of Green Rocks should not encroach upon the areas with a modelled VxD of greater than 1.4 at the 1% AEP event, and
- mound footprints constructed upstream of Green Rocks should not encroach upon the areas with a modelled VxD of greater than 1.8 at the 1% AEP event.

The area referenced in the first criterium is the effective modelled footprint, which in real terms is approximately halfway between the top area of the mound and the total footprint area at the existing ground surface. The 1.3 ha specified limit correlates with a 1.0 ha limit on mound top area (which is typical of the largest mound proposals). For ease of interpretation, the equivalent mound top area has been calculated and is presented in Chart 3 based on the total Lot area.

Perhaps the most significant uncertainty with assessing the cumulative impact of the future mound developments is the actual location at which each mound is sited. To account for this in the modelling, the physical obstruction presented by a hypothetical future mound development on each Lot has been evenly distributed across the entire Lot, using the Layered FC Shape and Storage Reduction Factor representations in TUFLOW. The former accounts for the reduction of available flood flow width (and associated increased velocities and hydraulic losses), whilst the latter accounts for the loss of available floodplain storage.

The percent blockage specified in both the Layered FC Shape and Storage Reduction Factor inputs was calculated using the maximum allowable mound area (i.e. 10% of the Lot area capped at 1.3 ha) divided by the available area for potential mound placement, i.e. the total Lot area minus the areas with a 1% AEP VxD above the corresponding threshold. The associated form loss applied in the Layered FC Shape was derived from the overall blockage percentage and was validated through comparison of model simulations using physical mound obstructions undertaken within the individual mound impact assessments, i.e. as Z Shape representations in TUFLOW.

Perhaps the most significant uncertainty with assessing the cumulative impact of the future mound developments is the actual location at which each mound is sited. To account for this in the modelling, the physical obstruction presented by a hypothetical future mound development on each Lot has been evenly distributed across the entire Lot, using the Layered FC Shape and Storage Reduction Factor representations in TUFLOW. The former accounts for the reduction of available flood flow width (and associated increased velocities and hydraulic losses), whilst the latter accounts for the loss of available floodplain storage.

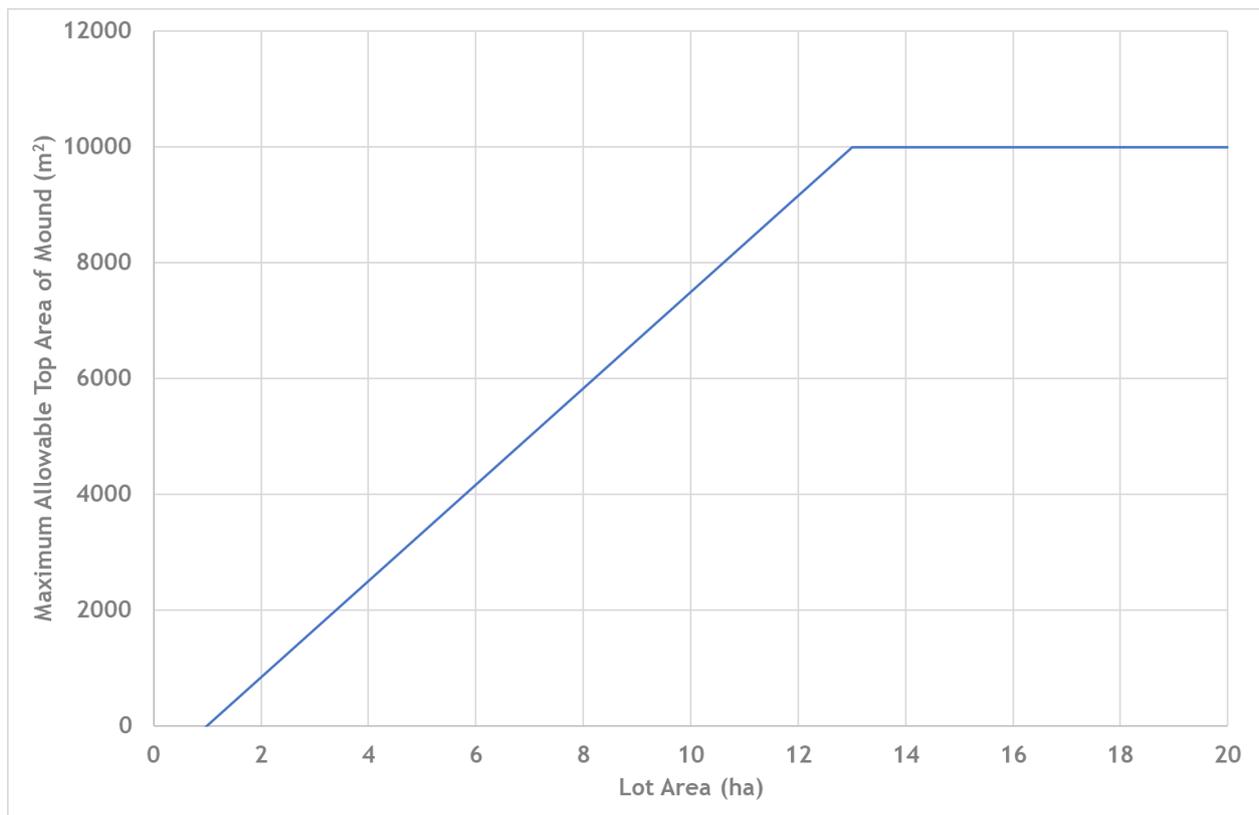


Chart 3 – Developable Mound Area by Lot Area

The percent blockage specified in both the Layered FC Shape and Storage Reduction Factor inputs was calculated using the maximum allowable mound area (i.e. 10% of the Lot area capped at 1.3 ha) divided by the available area for potential mound placement, i.e. the total Lot area minus the areas with a 1% AEP VxD above the corresponding threshold. The associated form loss applied in the Layered FC Shape was derived from the overall blockage percentage and was validated through comparison of model simulations using physical mound obstructions undertaken within the individual mound impact assessments, i.e. as Z Shape representations in TUFLOW.

Because the mound blockage in the cumulative development assessment is evenly distributed across the available area of each Lot, the model results are representative of the mound being located within an area where the average 1% AEP VxD product of the mound footprint matches that of the overall average of the available area. Therefore, to ensure that the ultimate impacts of future cumulative development do not exceed those presented in this assessment, future mound proposals should be located where the average 1% AEP VxD within the proposed mound footprint does not exceed that of the overall average of the available area within the Lot, as far as is reasonably possible.

With this additional constraint in mind, it is important to consider that the simulated flood impacts of the cumulative development assessment therefore represent the “worst case” conditions that could eventuate through future mound developments within the Hunter River floodplain, given the recommended constraint criteria. This condition would only be realised if the following were to occur:

- all the 306 Lots considered in the assessment construct earthen mounds – some may not
- all the constructed mounds are of the maximum allowable size – some may be smaller

- all the constructed mounds are sited in locations representative of average conditions throughout the potential available area – some may be sited in locations with a below average VxD.

The cumulative development impact assessment has been simulated for the 1% AEP event, as this is the principal design event for flood planning purposes. It also happens to be around the magnitude at which the localised impacts of individual mounds in the Hunter River estuary floodplain are typically found to be greatest. Figure 19 presents the modelled flood level impact for the cumulative development assessment “worst case” scenario, i.e. that in which all 306 Lots construct mounds to the limit of the recommended criteria. It shows that the impacts of potential future development are relatively minor, with the recommended constraint criteria in place.

The modelled peak flood level impacts are negligible (i.e. < 0.01 m) upstream of Bolwarra and Seaham and downstream of Woodberry and peak at around 0.05 m at Duckenfield, and around 0.08 m between Hinton and Bolwarra. This is limited to an increase in flood level, with a negligible increase in flood extent. The impacted area also has few receptors aside from the communities that are directly benefitting from the developments. The most significant receptors in terms of flood impact are Seaham, Raymond Terrace and Morpeth where the peak flood levels are increased by around 0.04 m, 0.03 m and 0.02 m, respectively. Further, additional model simulations have found that a reduction in actual development from the maximum developable potential produces a similar reduction in flood level impacts. If only 80% of the maximum developable potential is realised, then the flood level impact at Raymond Terrace is reduced to around 0.02 m. If only 60% of the maximum developable potential is realised, then this is further reduced to around 0.01-0.02 m.

Figure 20 presents the modelled flood velocity impact for the cumulative development assessment. This does not represent a true picture of likely impacts, as the actual velocity impacts will be highly localised to each individual mound location (unlike flood level impacts which are more widespread). However, it does have value in that it shows a negligible impact to the overall average flood velocities within the river channels or across the floodplain.

If future mound developments adhere to the recommended constraints to limit the impact of potential future cumulative development, then it is considered that the likely impacts resulting from such development will only be minor. The impacts are considered reasonable, particularly given the improved flood resilience that the construction of such mounds affords the local communities, most of which are used for the purposes of livestock refuge and/or shed constructions.

It is important to consider that whilst the cumulative development assessment attempts to best represent potential future impacts as far as is reasonable, individual site-specific conditions and impacts can and will vary from those that have been modelled. It is expected that most future mound proposals will be able to adhere to the guidelines recommend in this assessment. However, it should not necessarily exclude all development proposals that cannot satisfy the constraint criteria. In such cases of non-conforming development proposals, it is recommended that the cumulative impact assessment should be re-visited, substituting the assumed cumulative development conditions for the Lot in question with the actual proposed development. The result of such an assessment would need to demonstrate zero change in cumulative impact (except for impacts localised to the mound location itself).

The proposed mound at the Site conforms to all three recommended mound development criteria. The top area of the proposed mound is around 1500 m², which is less than the maximum area considered by the cumulative impact assessment, given the Lot area of around 16 ha (refer Chart 3), the footprint of the

modelled equivalent mound is not located within an area where the 1% AEP VxD product is more than 1.4 as required for lots downstream of Green Rocks, and the average 1% AEP VxD product within the modelled equivalent mound footprint is 0.95, which is less than the available area average of 1.0. Therefore, a site-specific cumulative development impact assessment is not required for this development.

The minimal impacts modelled for the flood impact assessment and site-specific cumulative development assessment show that the mound does not obstruct floodplain conveyance and so should not be considered as being located within a floodway.

Conclusion

The Site at 96 Woodberry Road, Millers Forest, NSW requires a flood assessment to accompany the DA for the proposed mound, being located within the Hunter River floodplain. The flood impact assessment has included use of a TUFLOW hydraulic model to simulate design flood conditions at the Site, whilst maintaining a reasonable consistency with the results of the previous studies. A cumulative development assessment has also been undertaken, as per other similar assessments for Maitland City Council.

The flood assessment has determined that the proposed mound is compatible with the existing flood hazard and does not result in adverse off-site flood impacts.

Further, the cumulative development assessment has found that if future mound developments adhere to the recommended constraints, then it is considered that the likely impacts resulting from such development will only be minor. The impacts are considered reasonable, particularly given the improved flood resilience that the construction of such mounds affords the local communities, most of which are used for the purposes of livestock refuge and/or shed constructions. The recommended criteria for sustainable mound development are:

- each Lot can accommodate a single mound development (or combination of multiple smaller mounds) totalling up to 10% of the Lot area, capped at a maximum of 1.3 ha per Lot
- mound footprints should not encroach upon the areas with a modelled VxD of greater than 1.4 at the 1% AEP event for Lots downstream of Green Rocks and
- mound footprints should not encroach upon the areas with a modelled VxD of greater than 1.8 at the 1% AEP event for Lots upstream of Green Rocks and
- mounds should be located where the average 1% AEP VxD within the proposed mound footprint does not exceed that of the overall average of the available area within the Lot.


The proposed mound conforms to all three criteria, limiting the potential future impacts of cumulative development. The mound proposal is therefore considered acceptable from a cumulative development perspective.

The minimal impacts modelled for the flood impact assessment and site-specific cumulative development assessment show that the mound does not obstruct floodplain conveyance and so should not be considered as being located within a floodway.


We trust that this report meets your requirements. For further information or clarification please contact the undersigned.

Yours faithfully


Torrent Consulting

A handwritten signature in black ink that reads "Daniel Williams". The signature is written in a cursive style with a long horizontal flourish at the end.

Dan Williams
Director

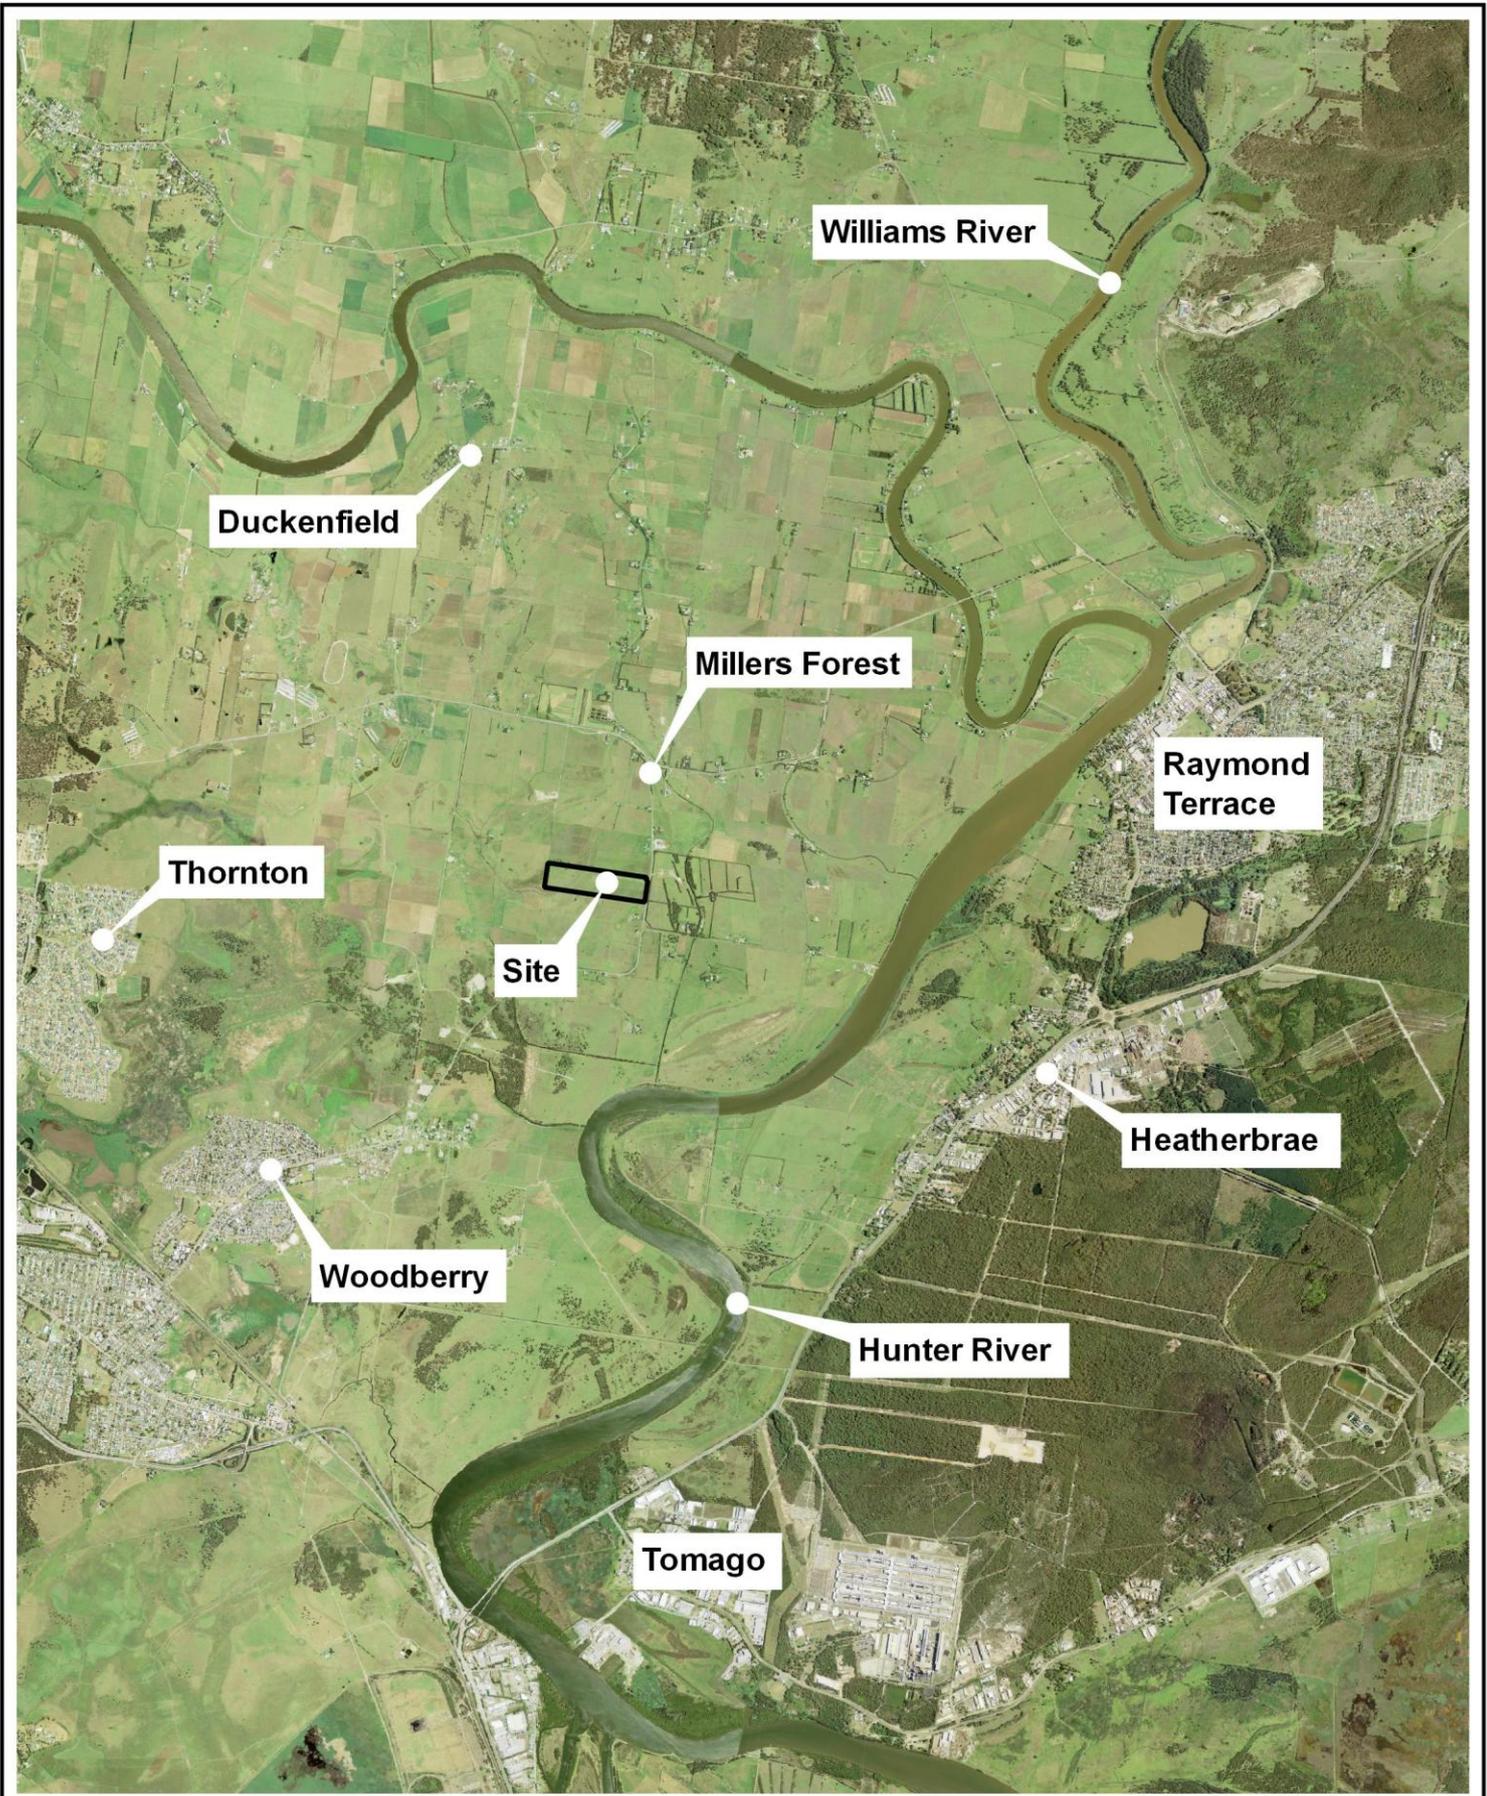

| | | | |
|--|--|-------------------------------|--|
| Title: Study Locality | | 0 1 2 km approx. scale | |
| Figure: | 1 <i>Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.</i> | | |
| Revision: | A | | |
| Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_001_250415_Locality.qgz | | | |

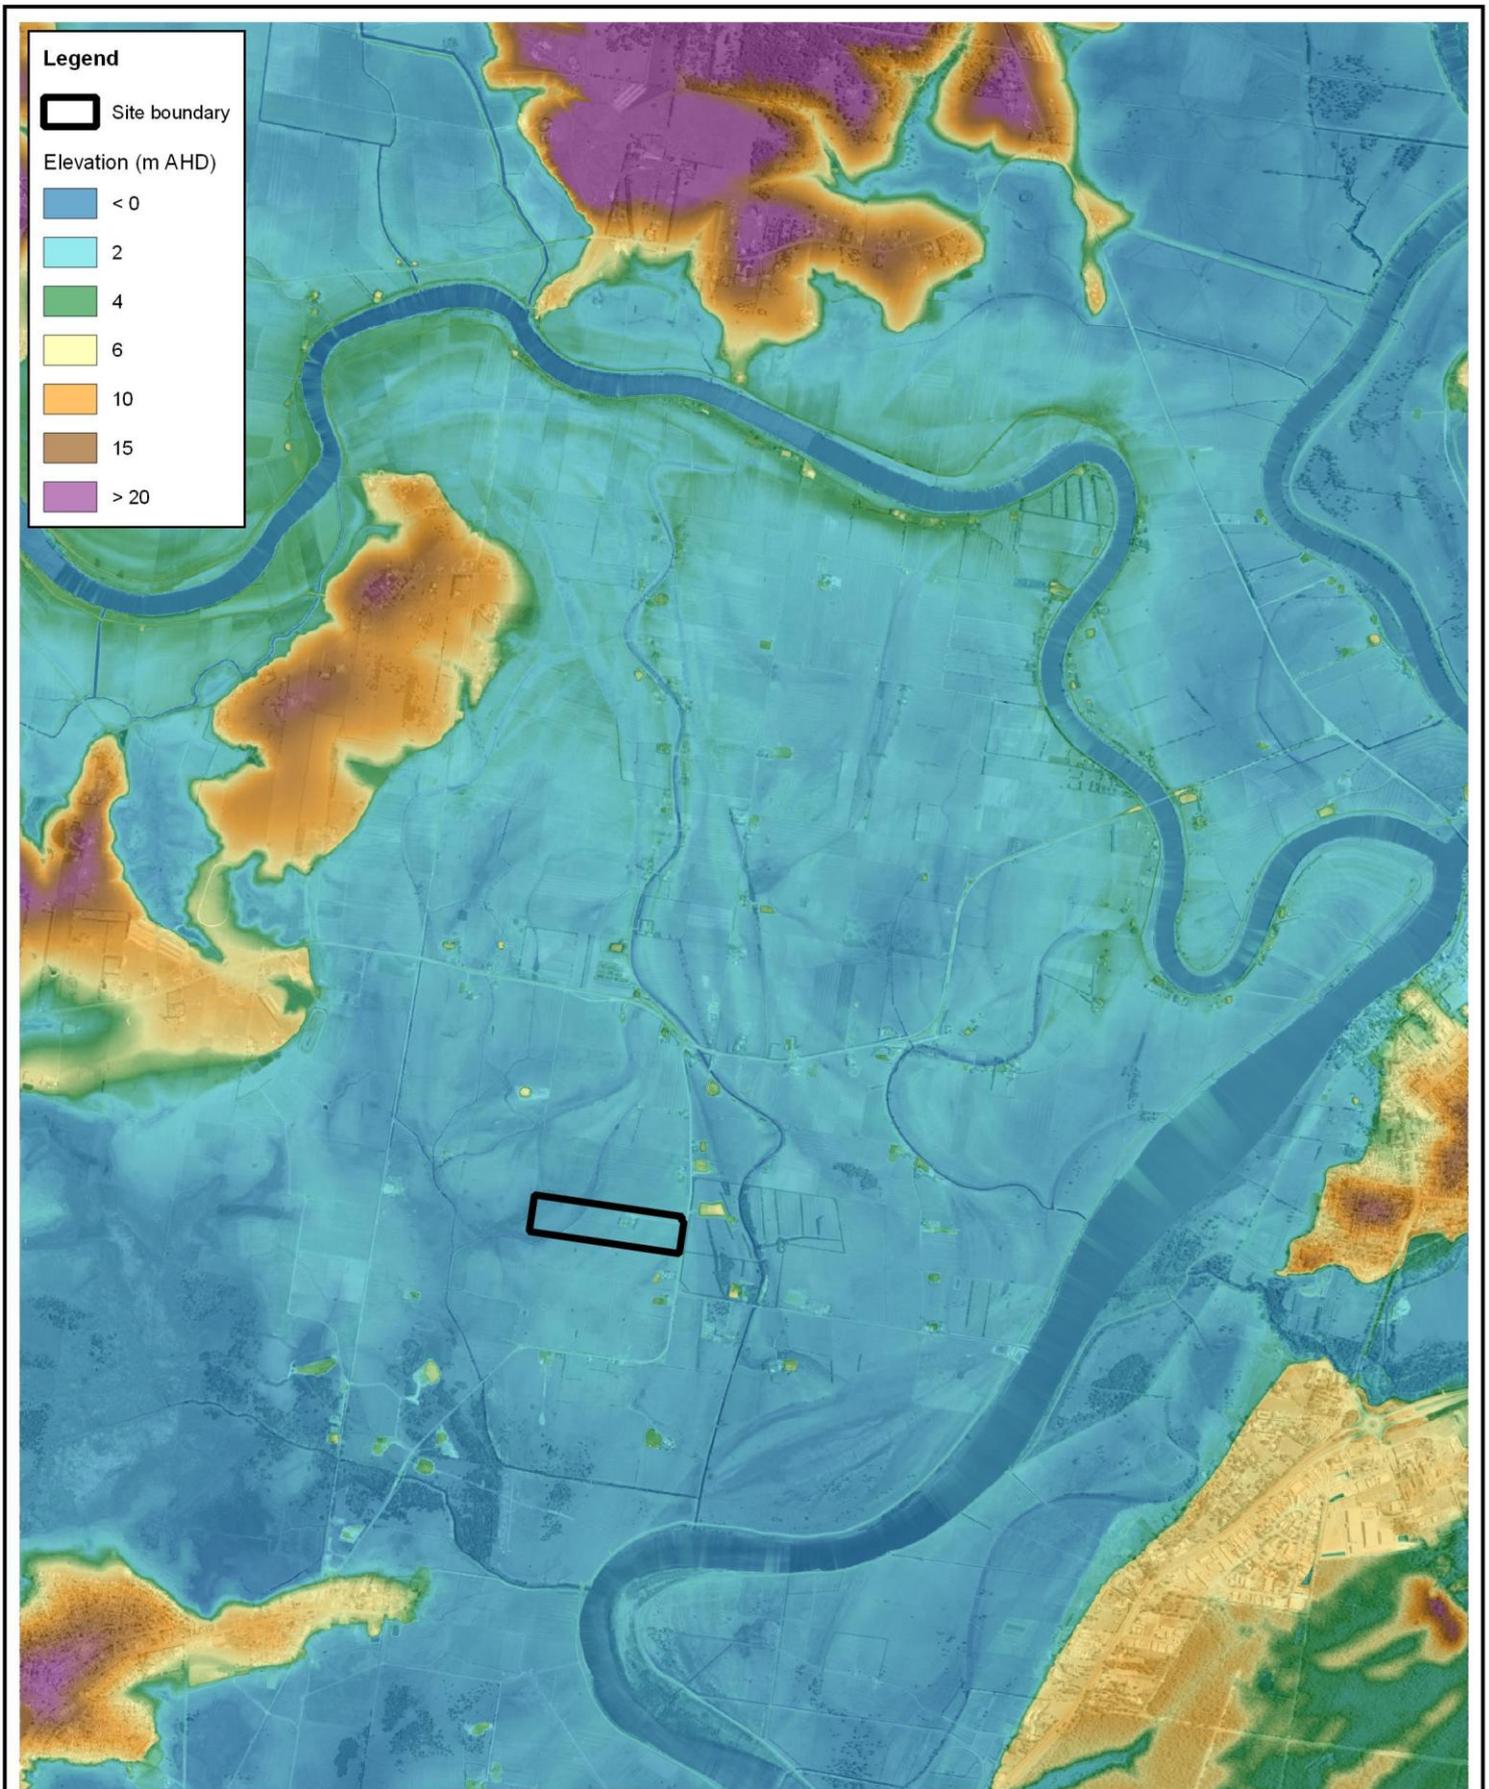

Title:
Local Floodplain Topography


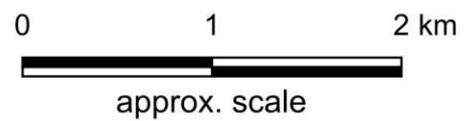


Figure: **2** *Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.*

Revision: **A**



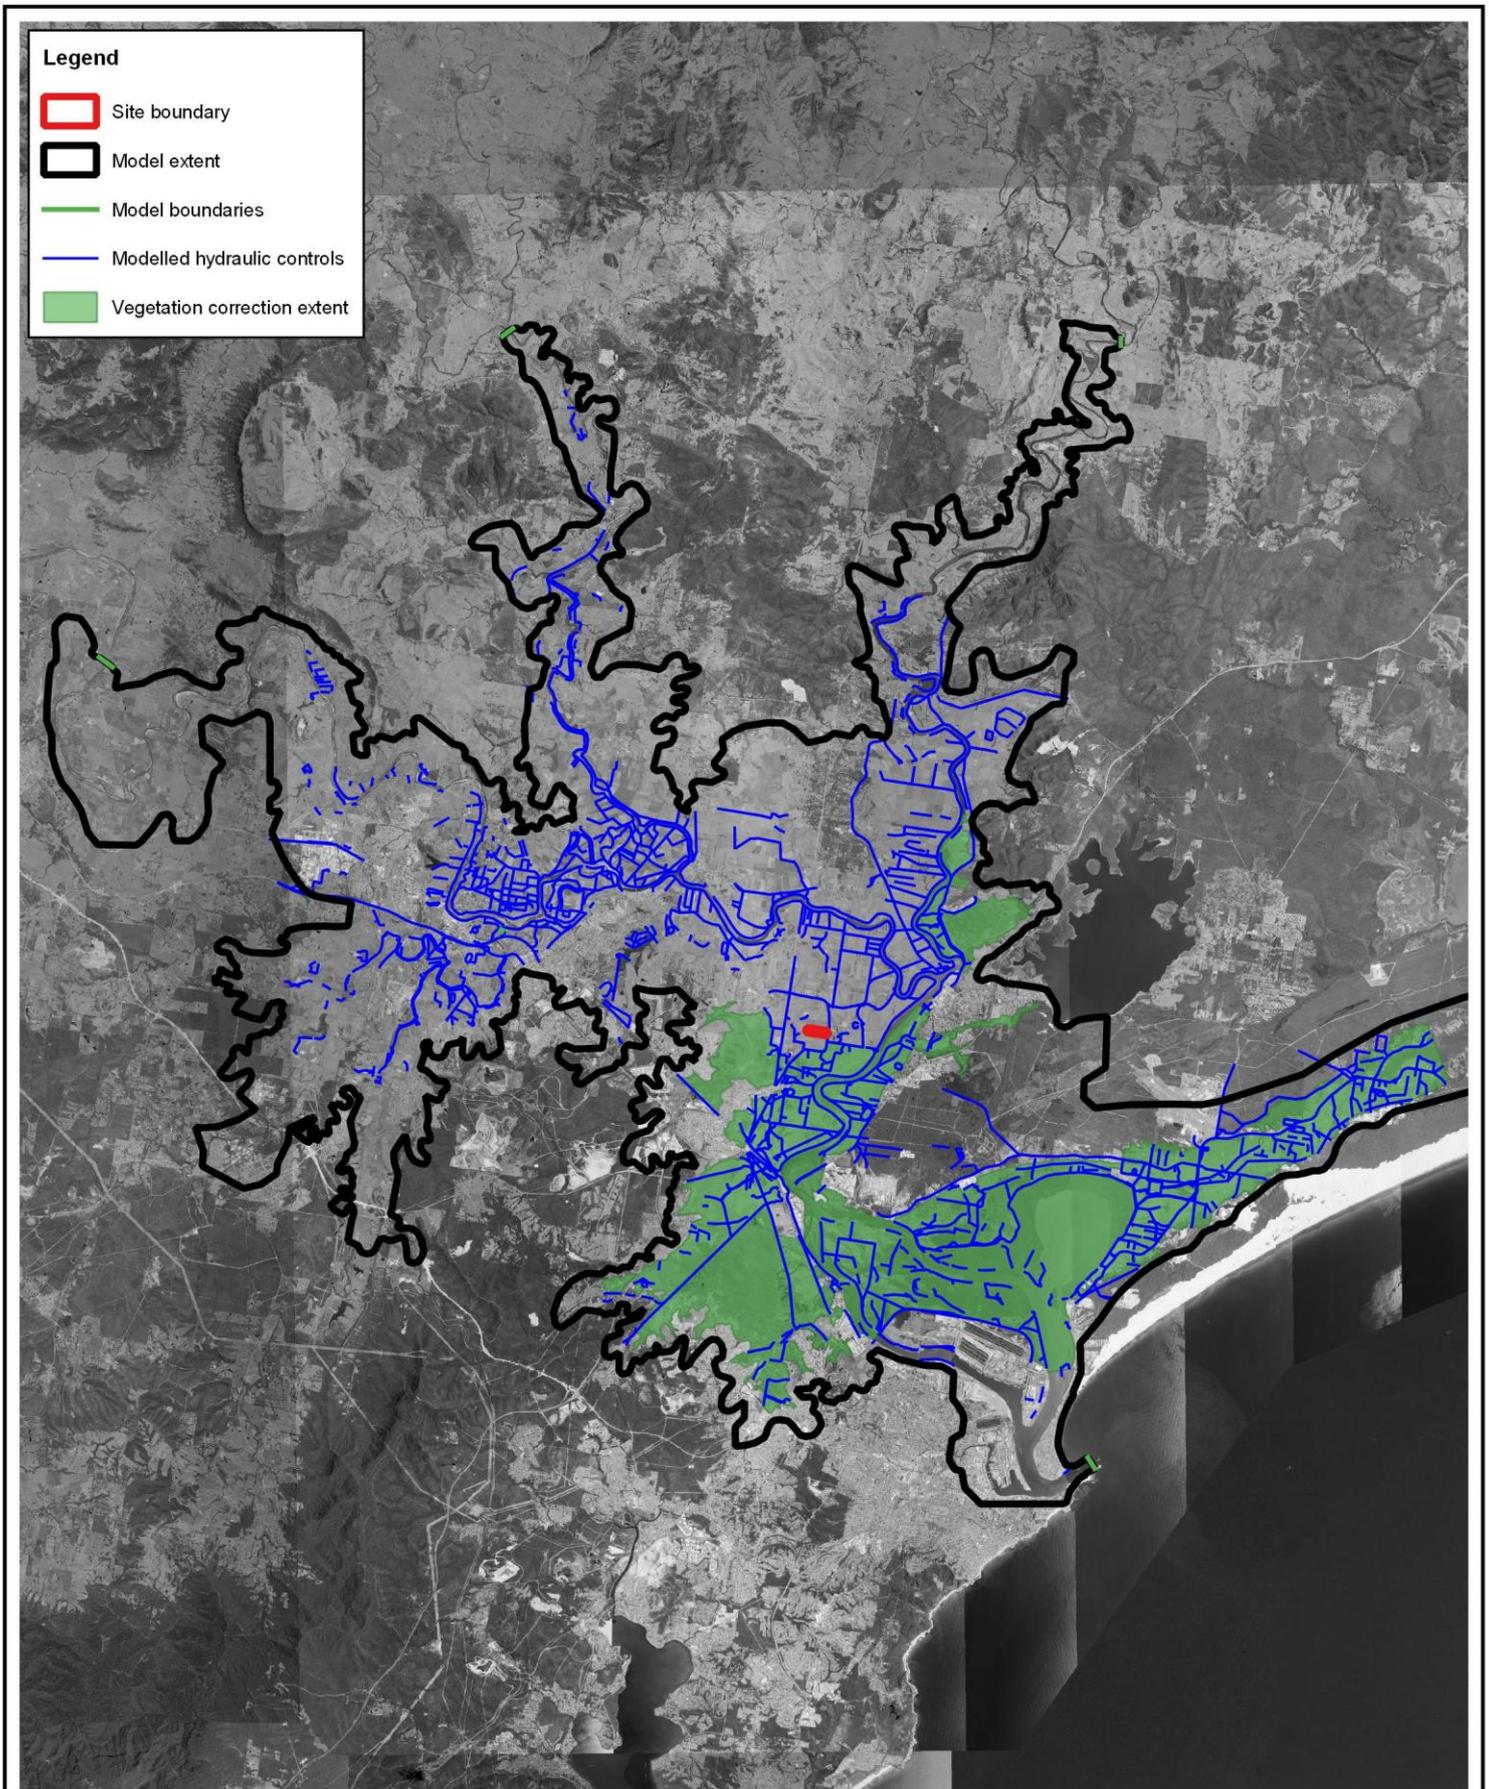

Legend

- Site boundary
- Model extent
- Model boundaries
- Modelled hydraulic controls
- Vegetation correction extent

Title:
TUFLOW Model Components


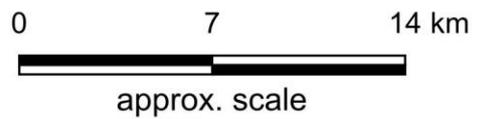


Figure: **3** *Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.*


Revision: **A**



Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_003_250415_TUFLOW.qgz

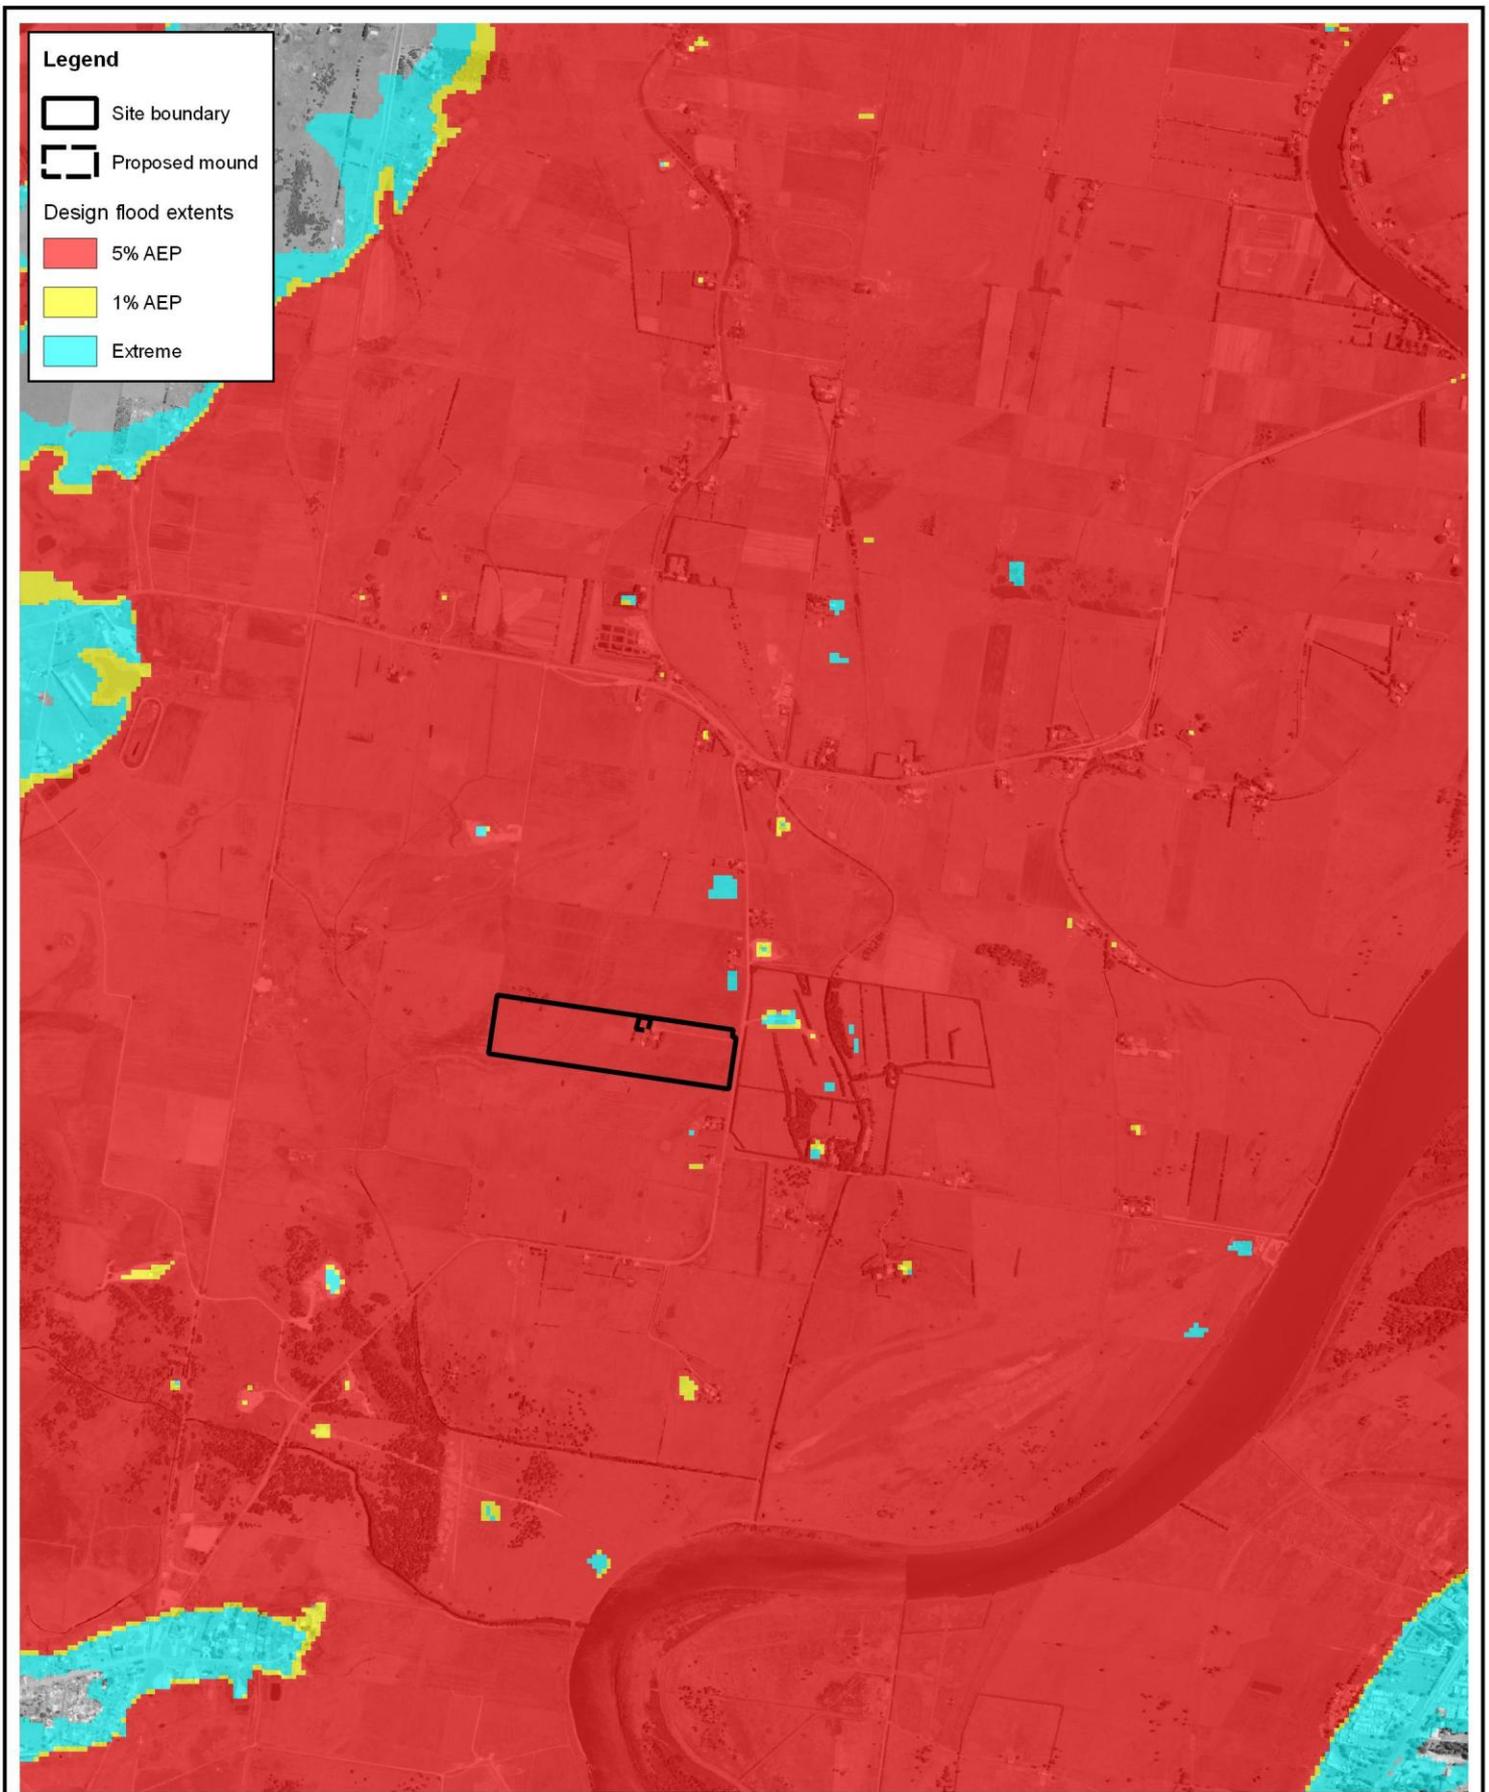

| | | | |
|---|----------|--|--|
| Title: Modelled Design Flood Extents | | 0 0.6 1.2 km  approx. scale | |
| Figure: | 4 | <i>Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.</i> | |
| Revision: | A | | |
| Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_004_250415_Extents.qgz | |   www.torrentconsulting.com.au | |

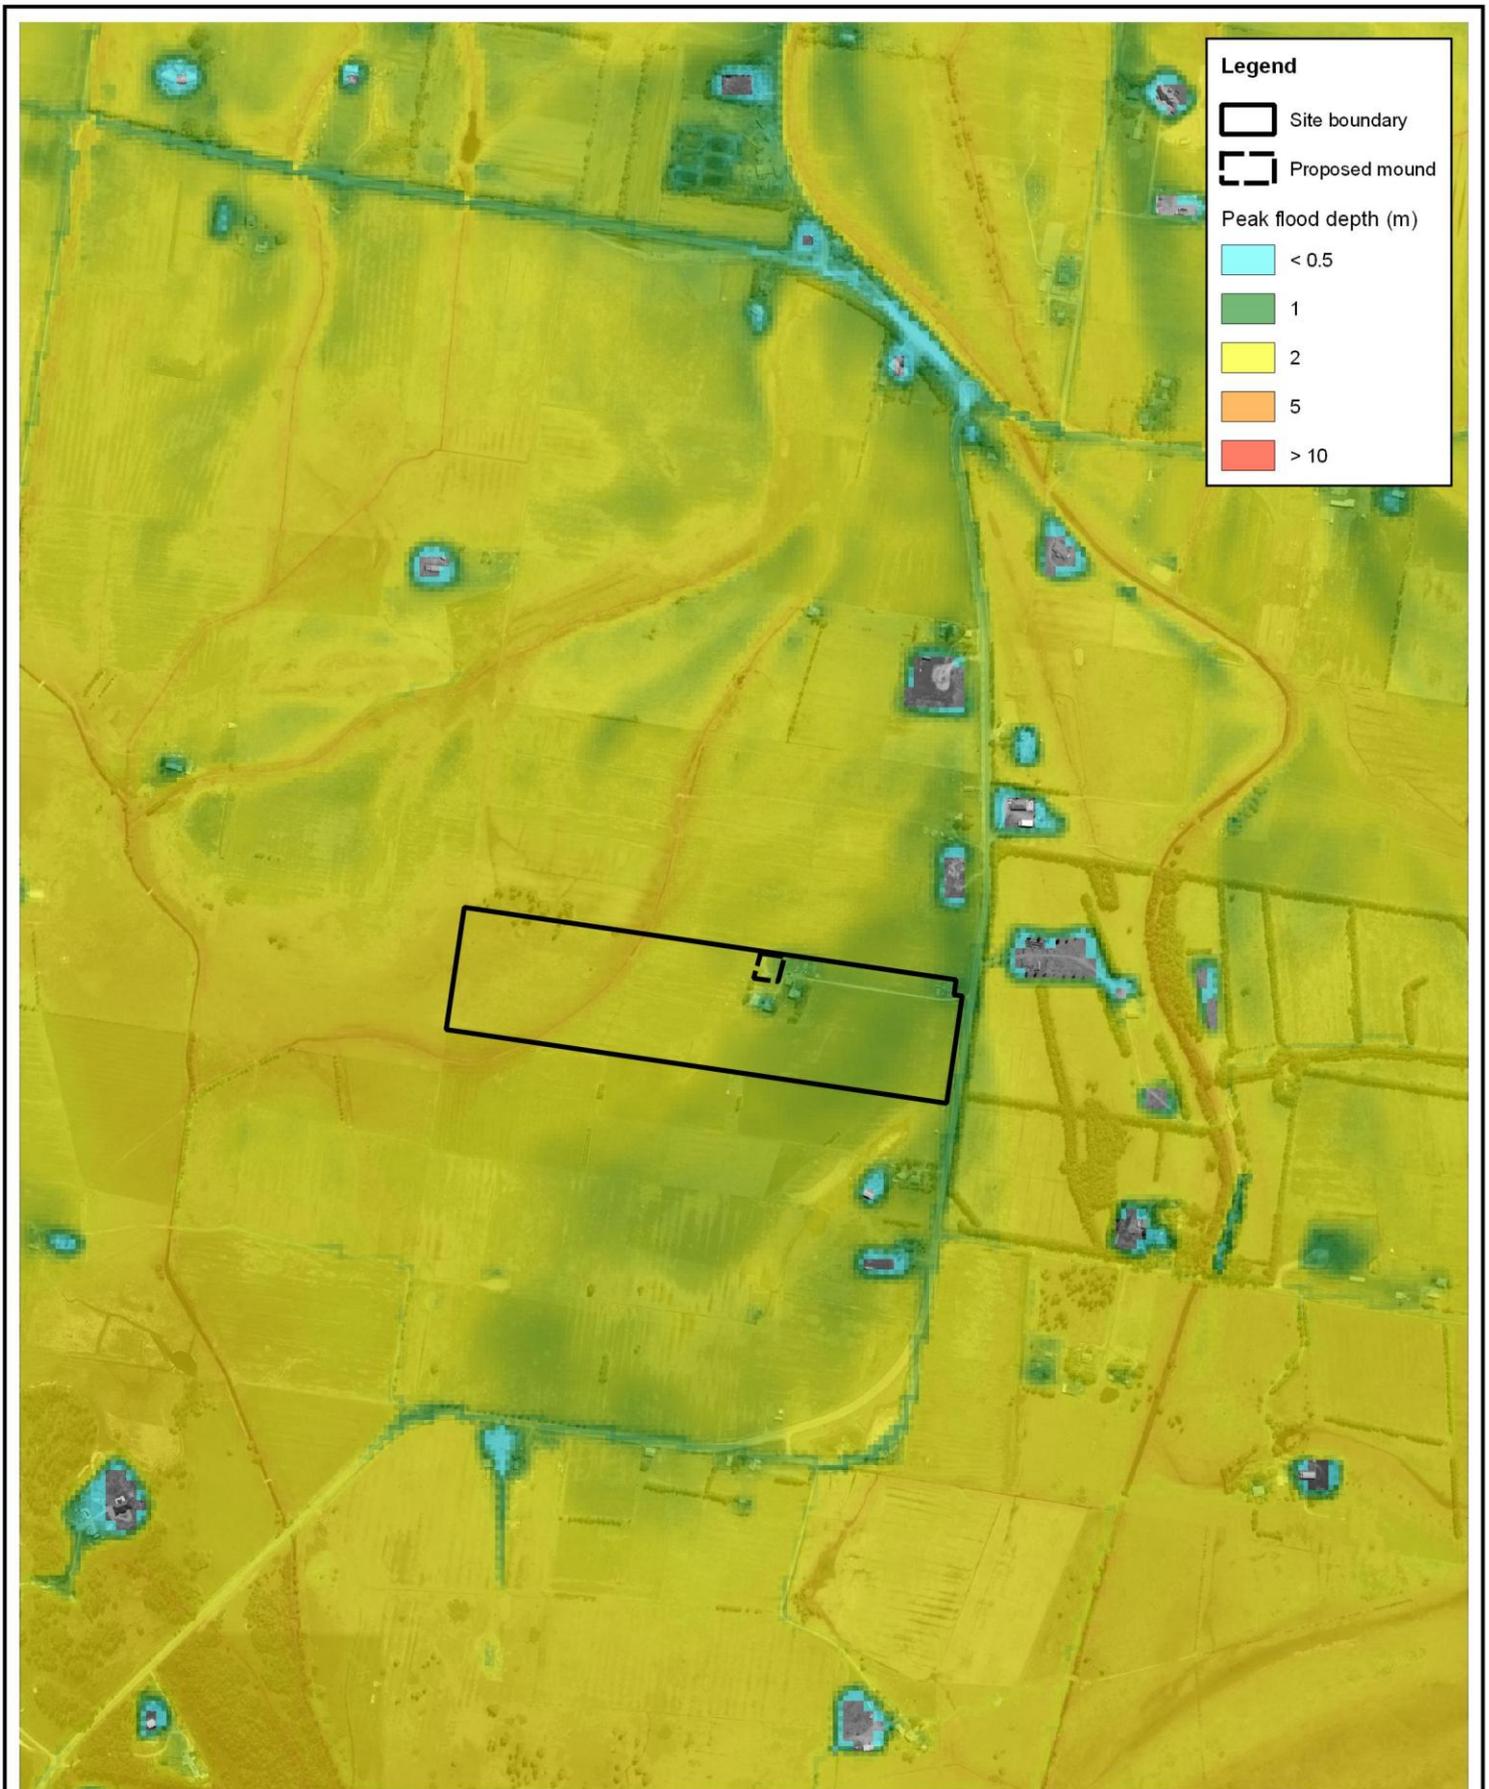

Legend

-  Site boundary
-  Proposed mound
- Peak flood depth (m)
-  < 0.5
-  1
-  2
-  5
-  > 10

Title:
Modelled 5% AEP Flood Depths

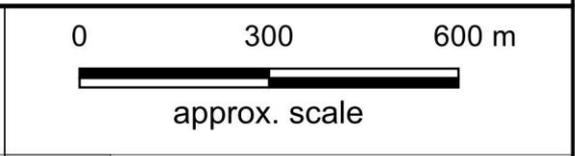



Figure: **5**

Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.



Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_005_250415_20y_levels.qgz

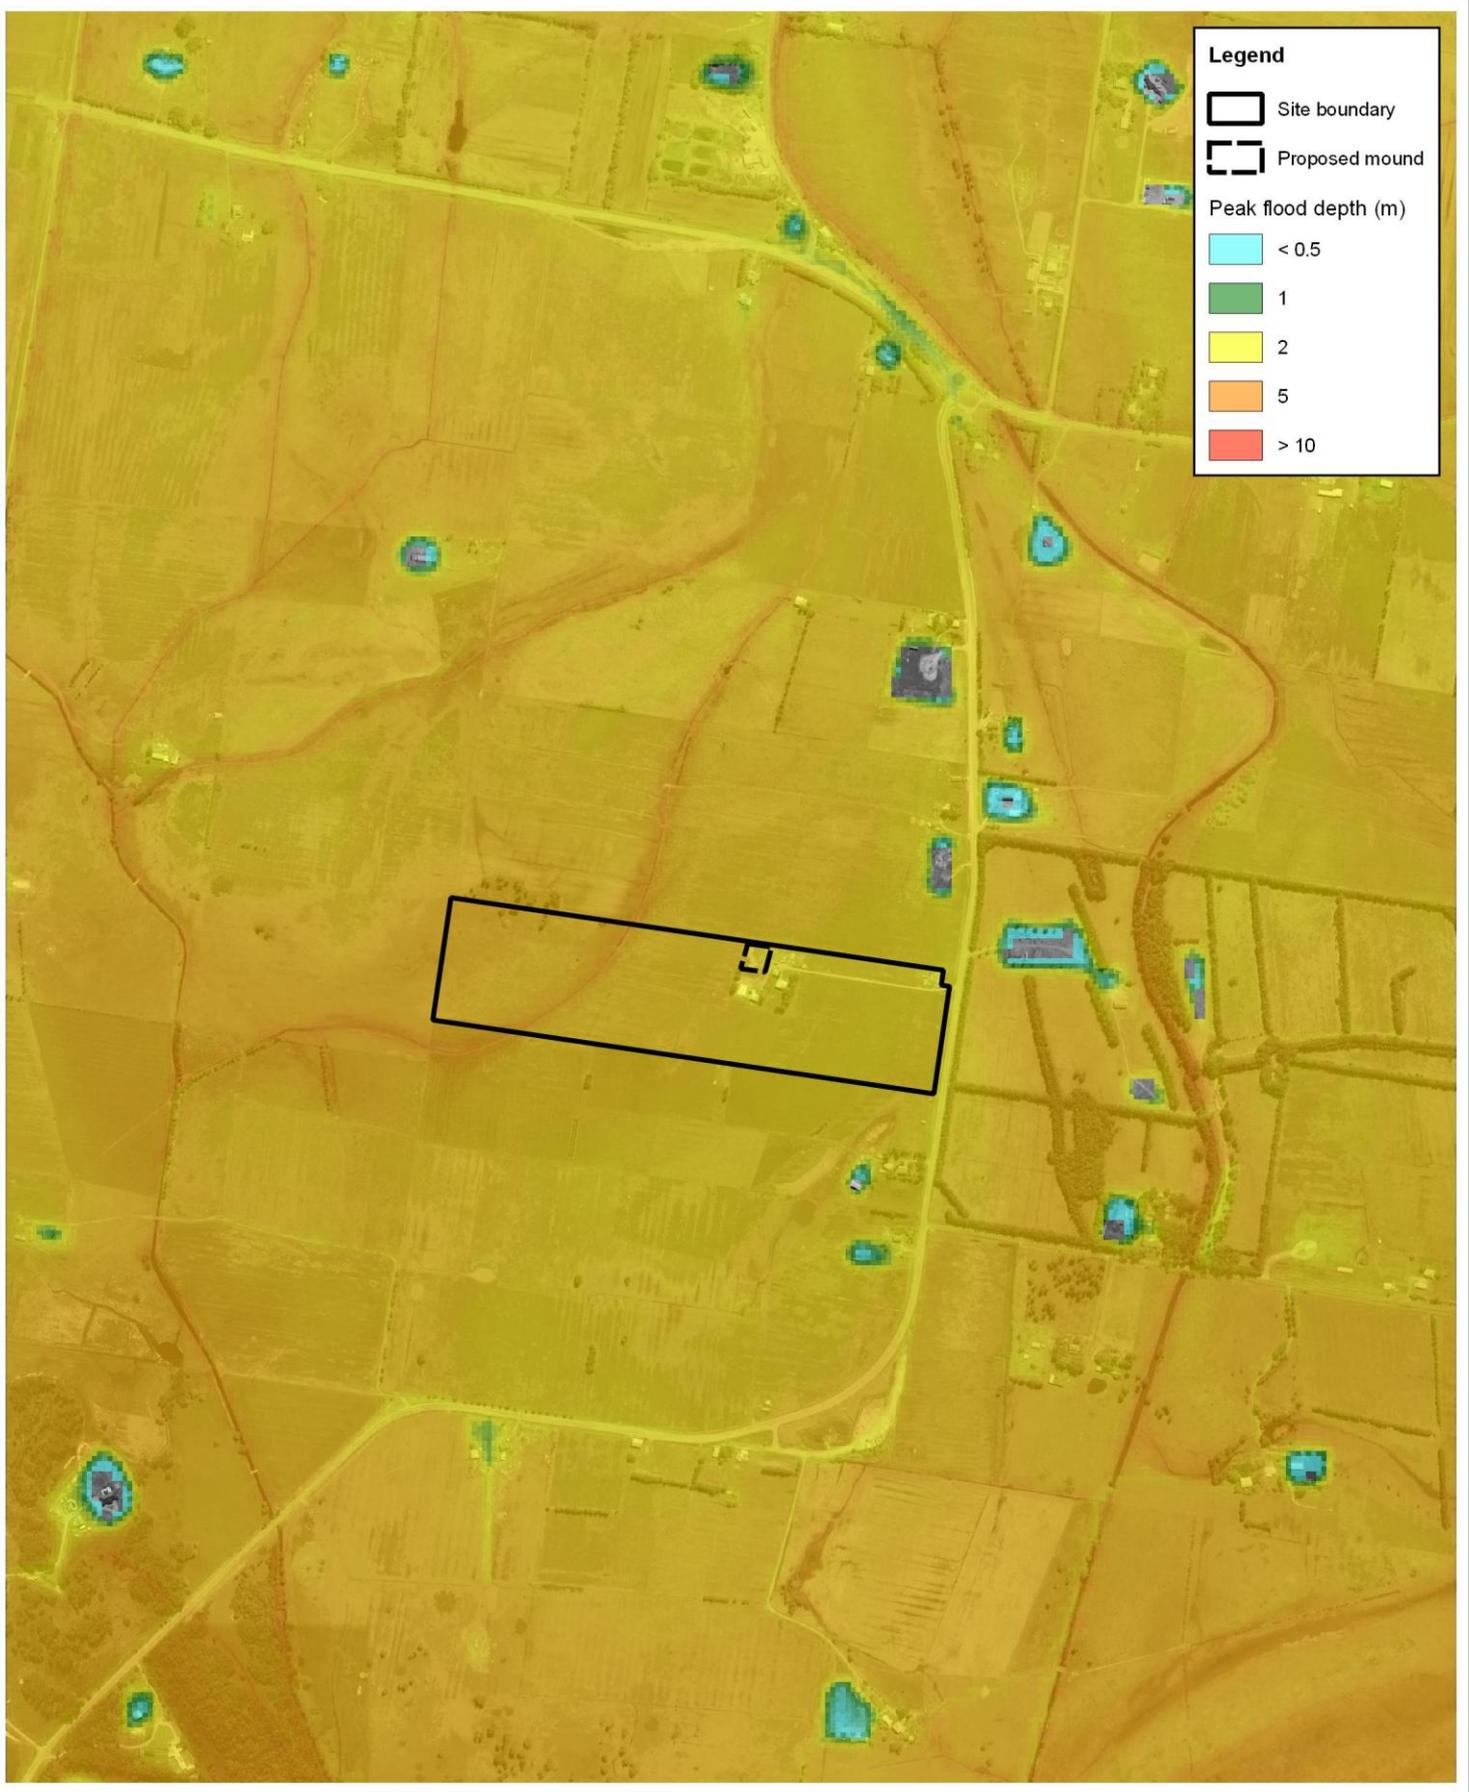

Legend

- Site boundary
- Proposed mound

Peak flood depth (m)

- < 0.5
- 1
- 2
- 5
- > 10

Title:
Modelled 1% AEP Flood Depths


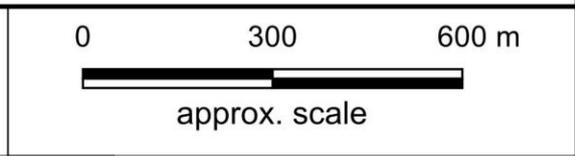


Figure: **6**

Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_006_250415_100y_levels.qgz

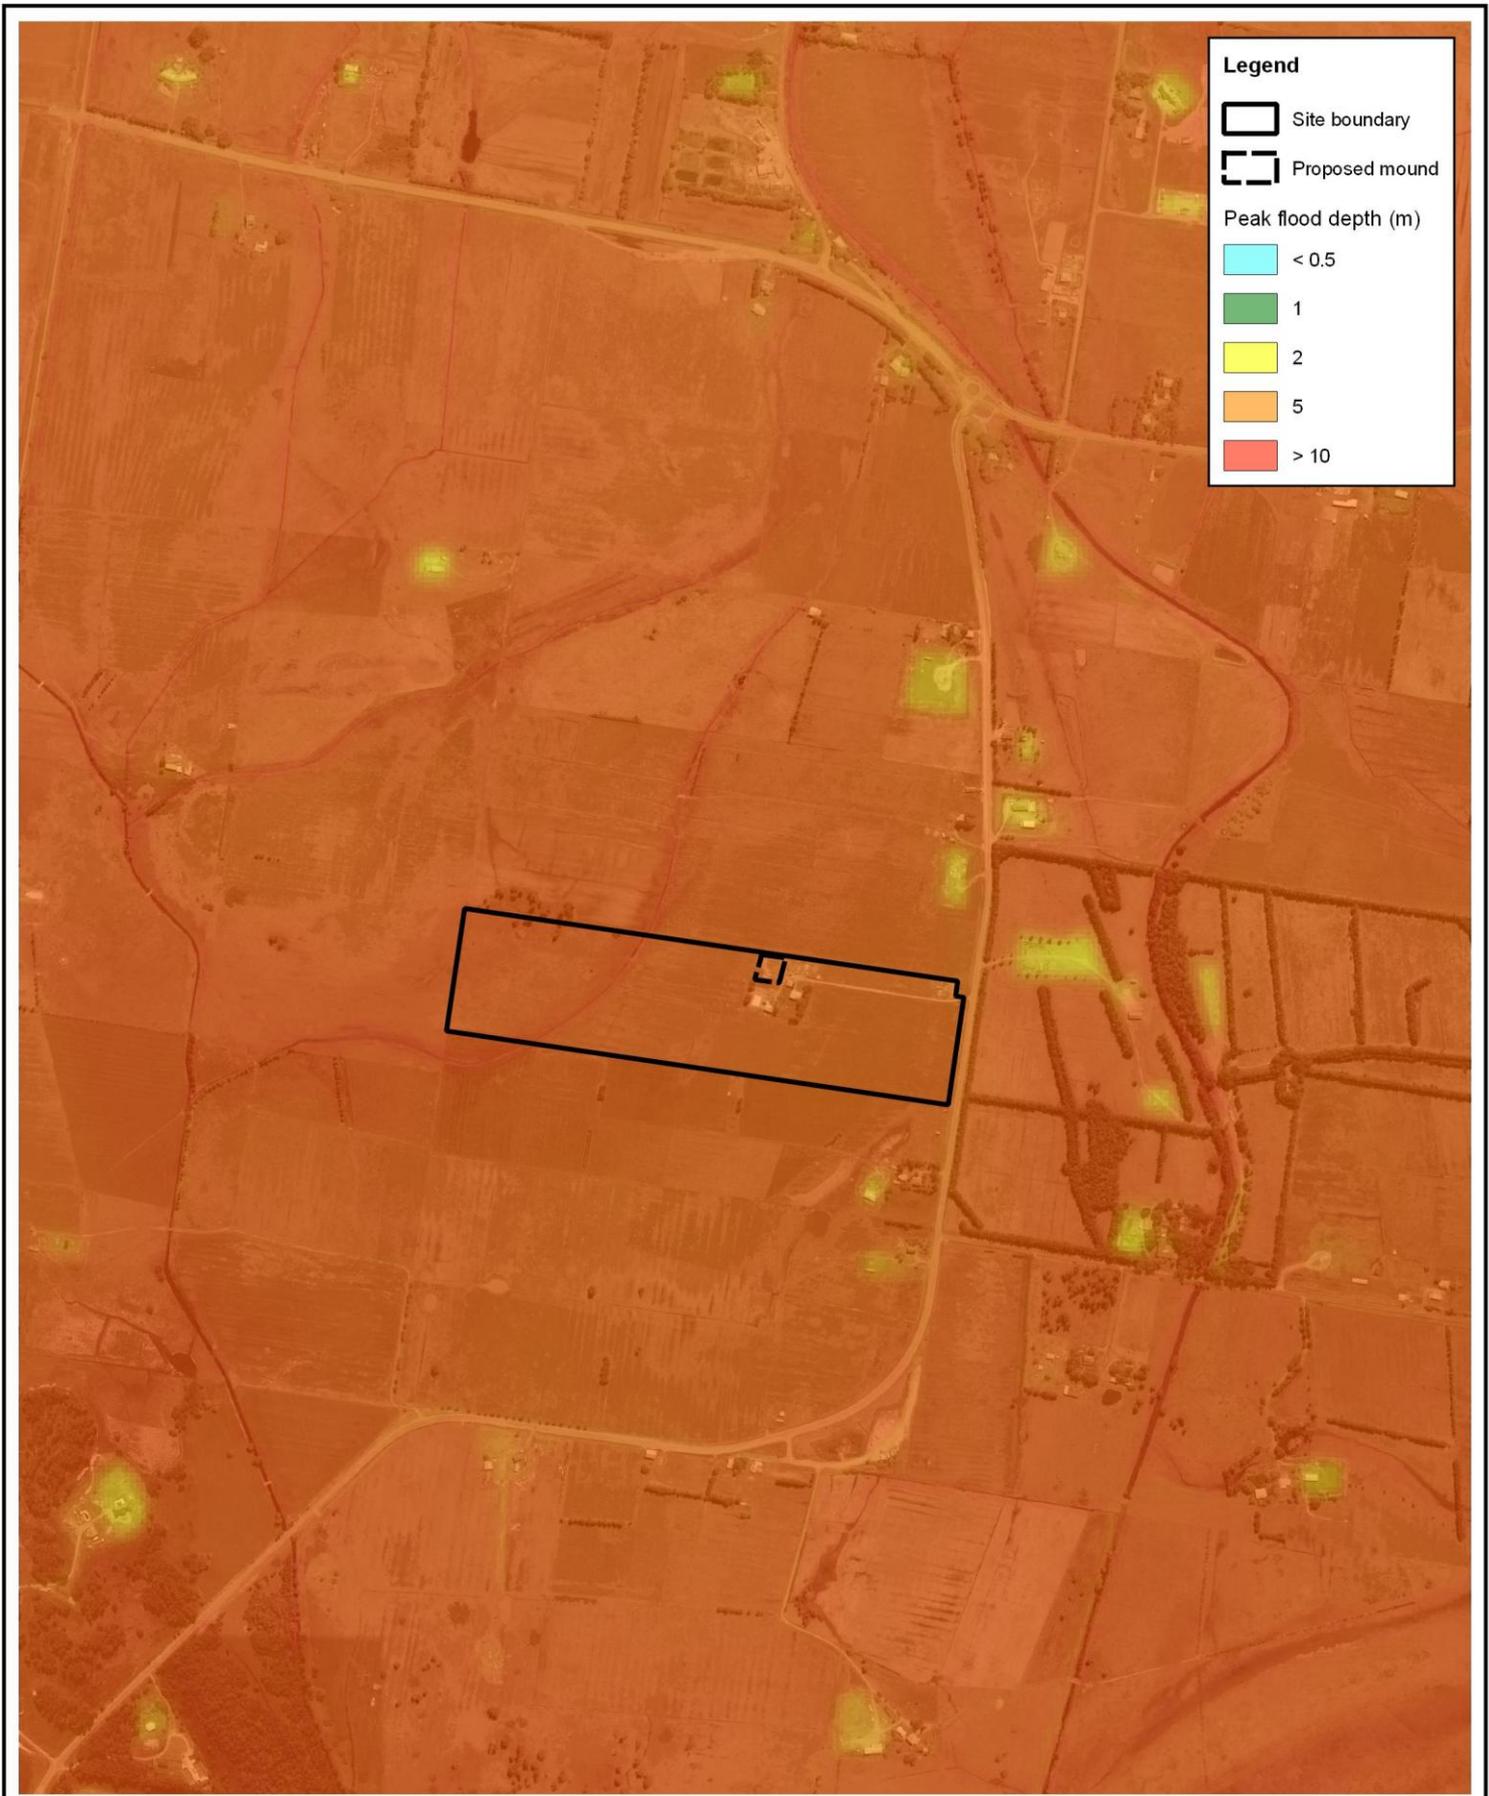

Legend

- Site boundary
- Proposed mound

Peak flood depth (m)

- < 0.5
- 1
- 2
- 5
- > 10

Title:
Modelled Extreme Flood Depths

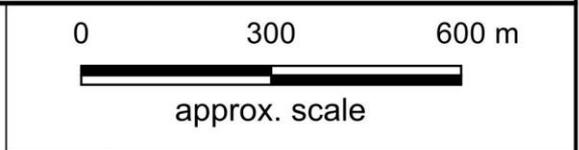


Figure: **7**


Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.



www.torrentconsulting.com.au

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_007_250415_extreme_levels.qgz

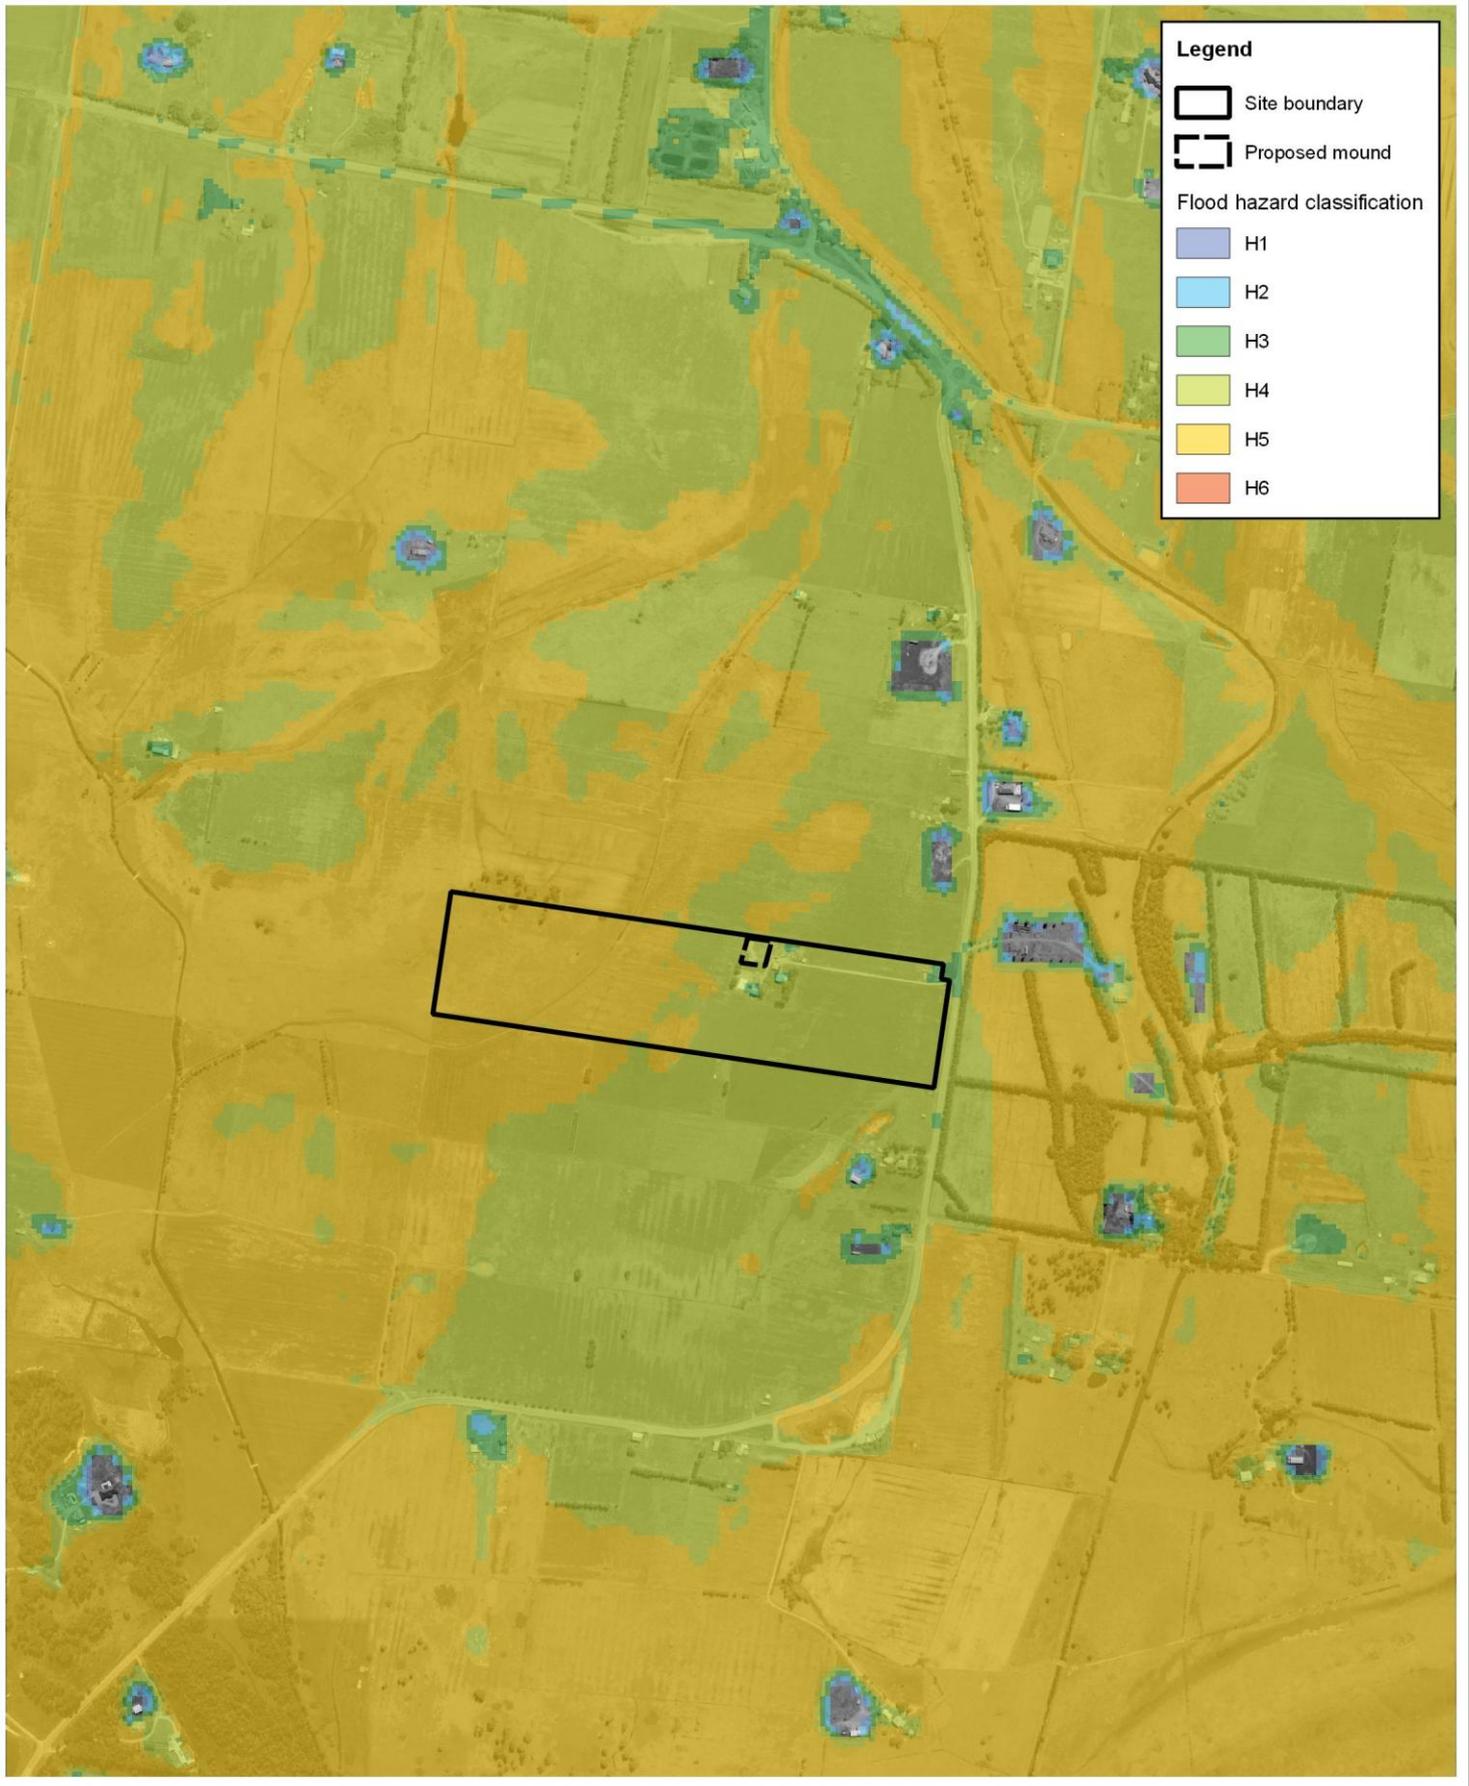

Legend

-  Site boundary
-  Proposed mound

Flood hazard classification

-  H1
-  H2
-  H3
-  H4
-  H5
-  H6

Title:
Modelled 5% AEP Flood Hazard Classification

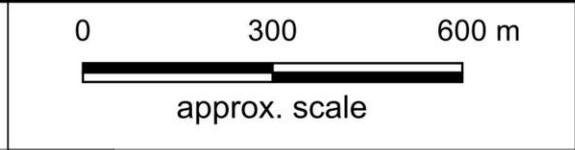



Figure: **8** *Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.*

Revision: **A**




www.torrentconsulting.com.au

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_008_250415_20y_hazard.qgz

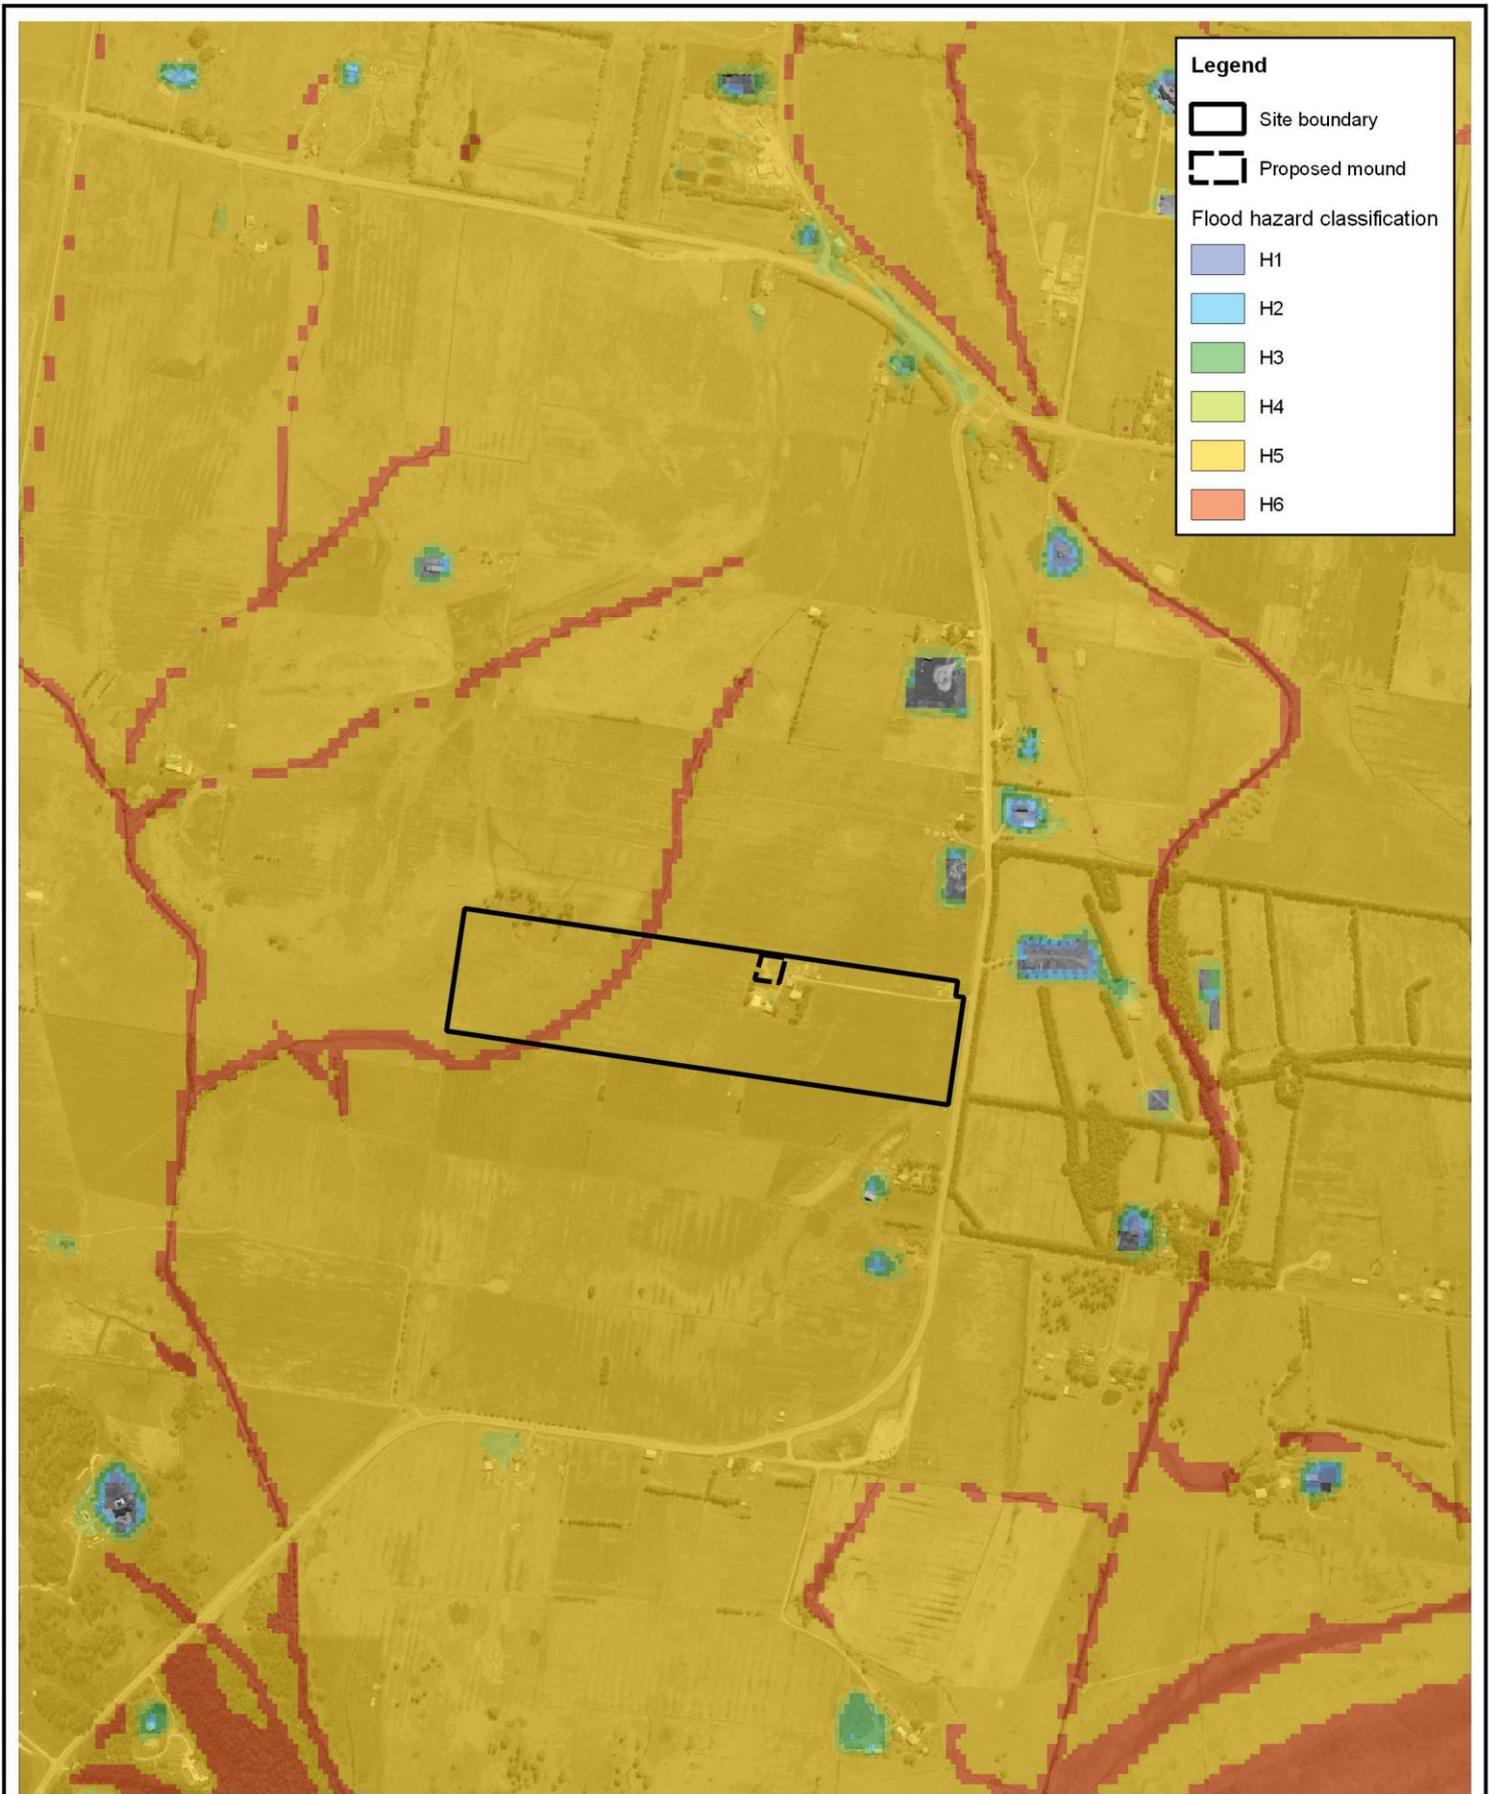

Legend

-  Site boundary
-  Proposed mound

Flood hazard classification

-  H1
-  H2
-  H3
-  H4
-  H5
-  H6

Title:
Modelled 1% AEP Flood Hazard Classification

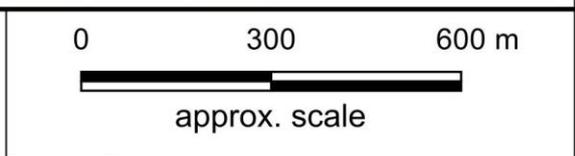



Figure: **9**
 Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_009_250415_100y_hazard.qgz




www.torrentconsulting.com.au

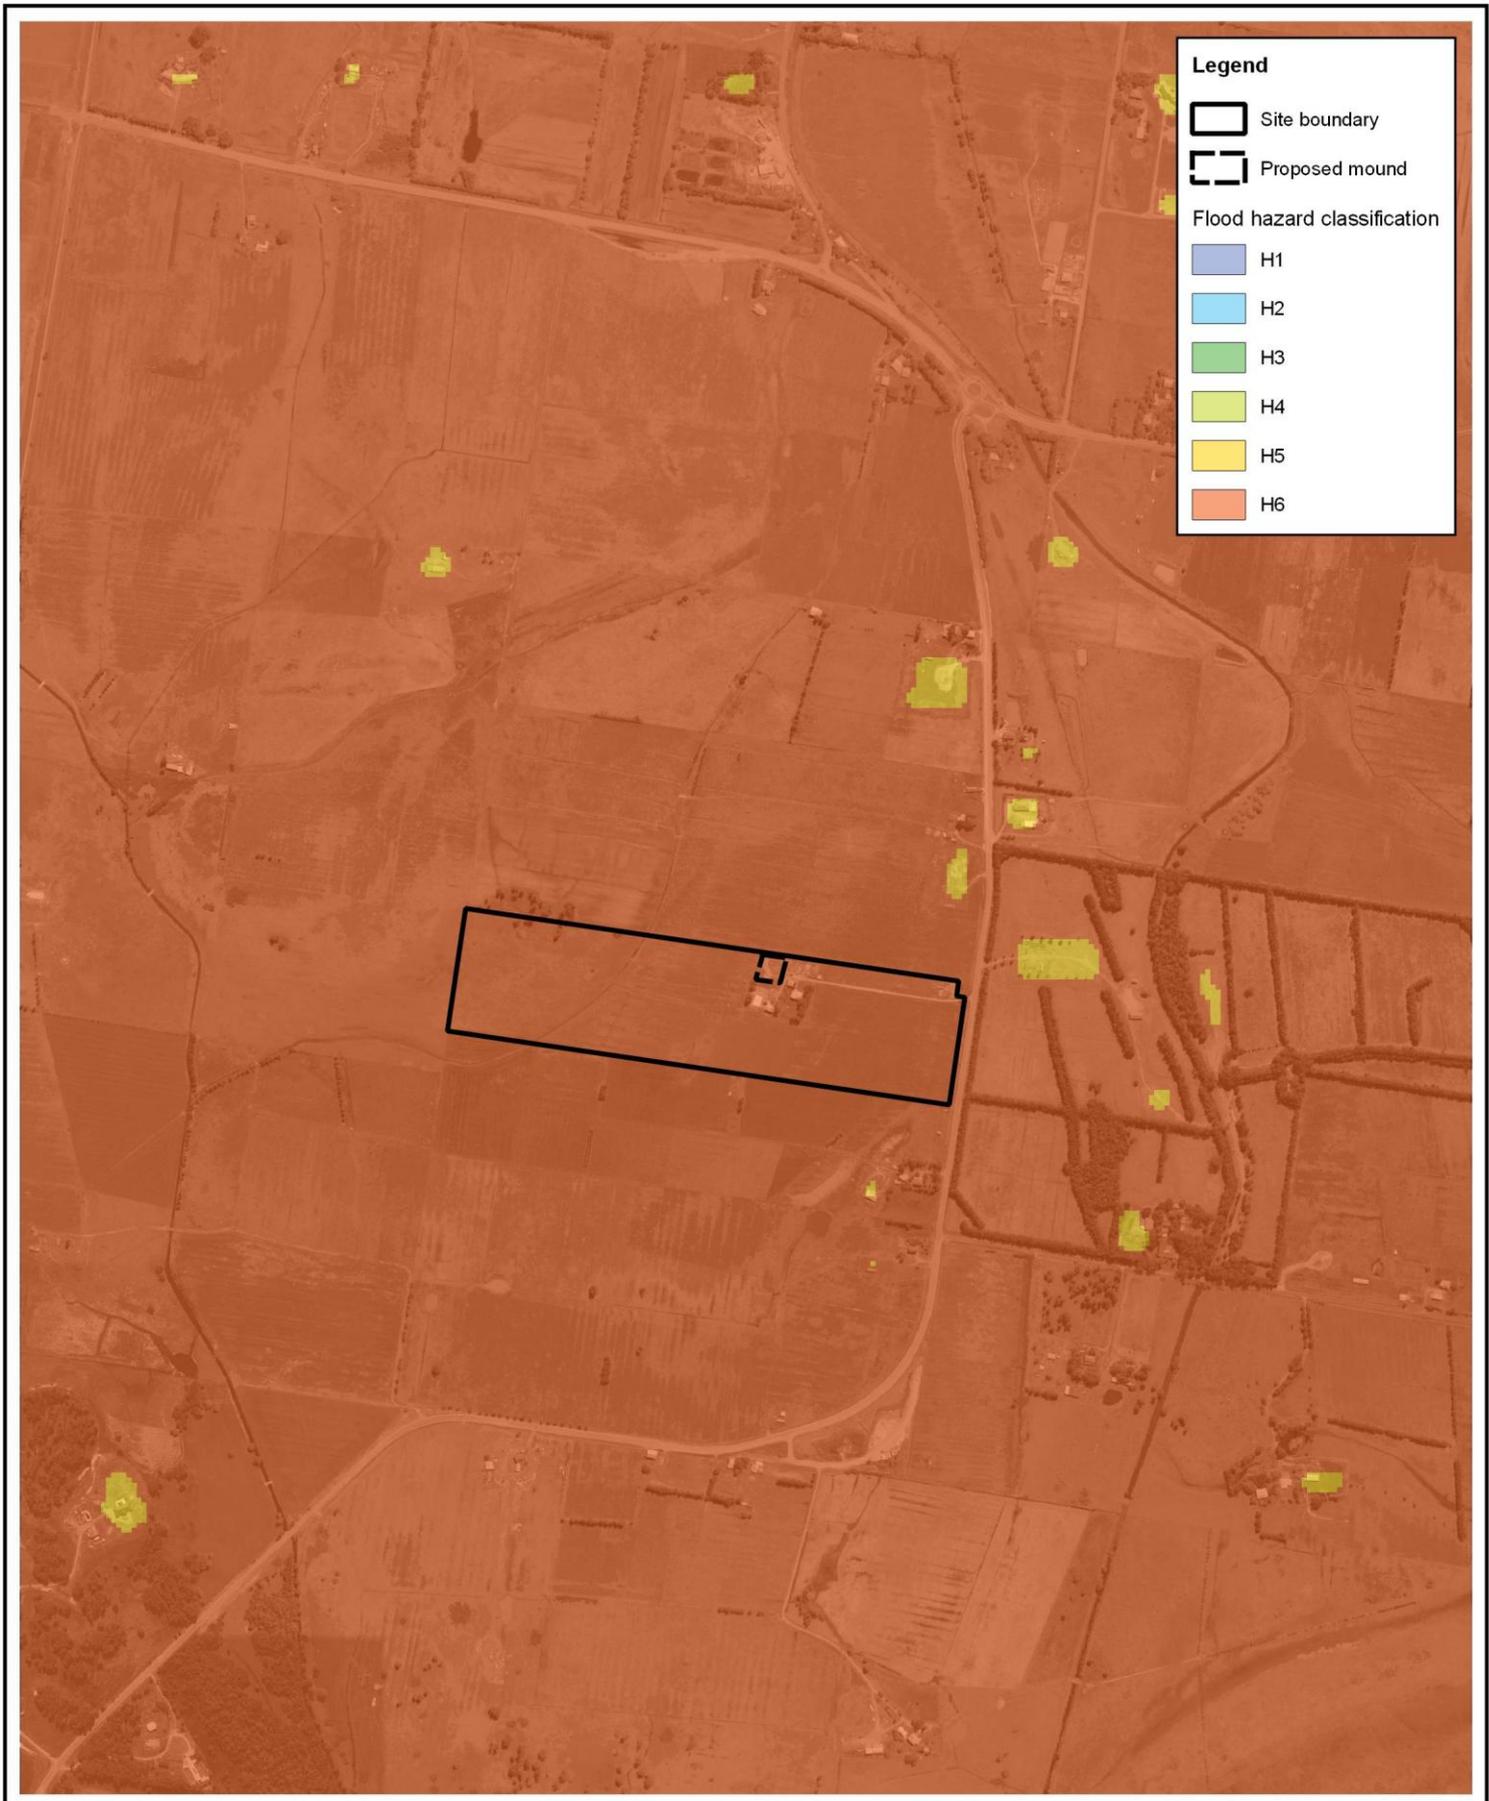

Legend

-  Site boundary
-  Proposed mound

Flood hazard classification

-  H1
-  H2
-  H3
-  H4
-  H5
-  H6

Title:
Modelled Extreme Flood Hazard Classification

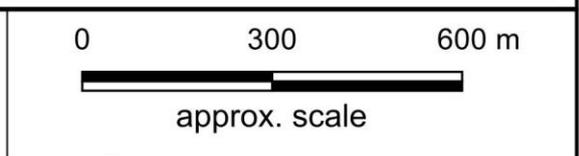



Figure: **10**
 Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.




www.torrentconsulting.com.au

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_010_250415_extreme_hazard.gqz

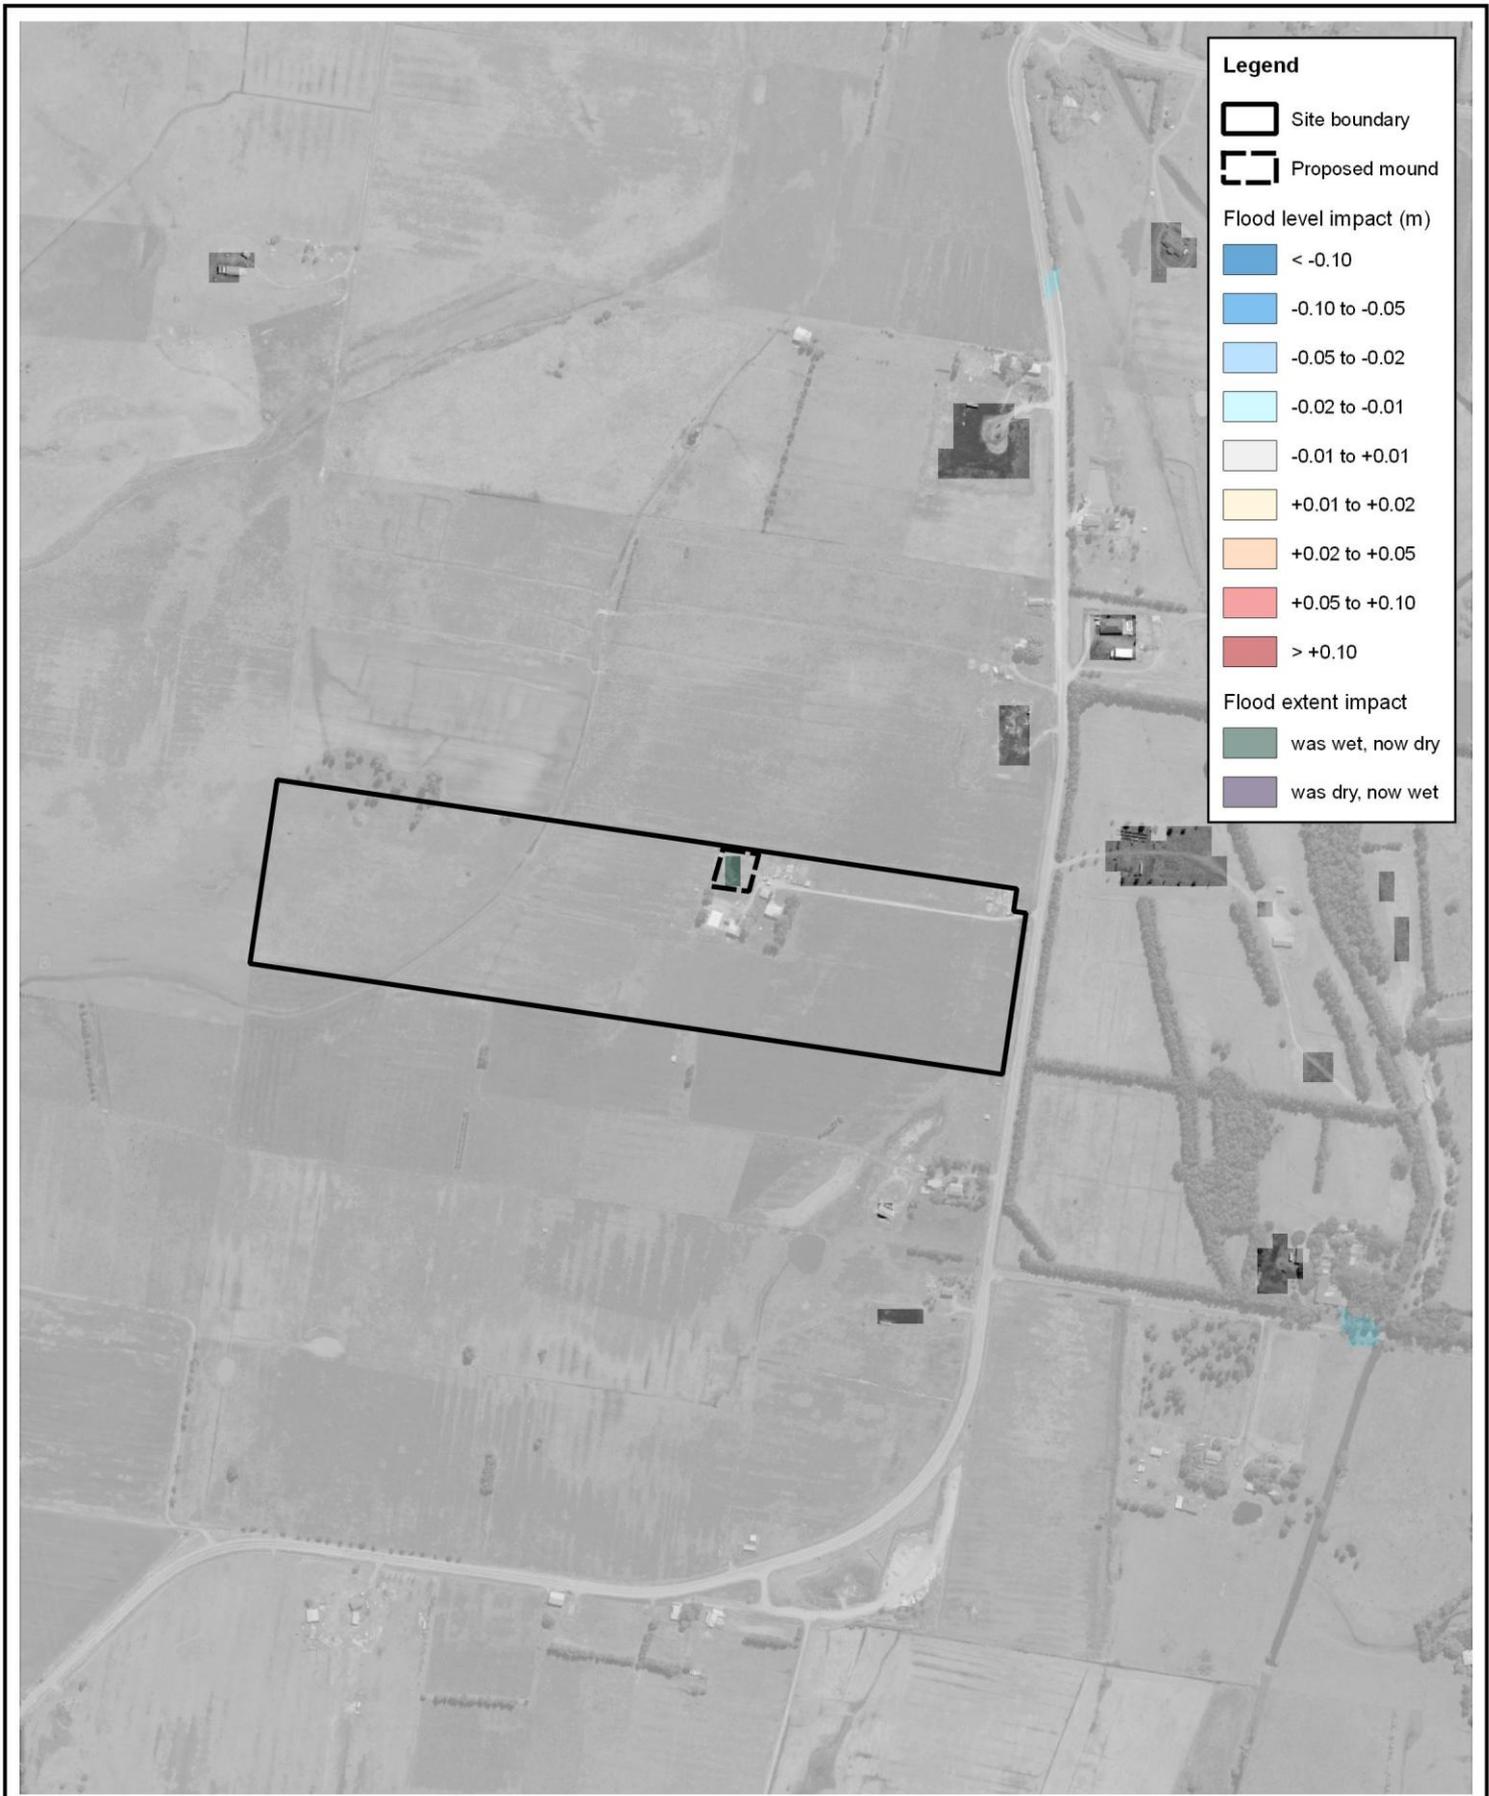

Legend

-  Site boundary
-  Proposed mound

Flood level impact (m)

-  <math>< -0.10</math>
-  -0.10 to -0.05
-  -0.05 to -0.02
-  -0.02 to -0.01
-  -0.01 to +0.01
-  +0.01 to +0.02
-  +0.02 to +0.05
-  +0.05 to +0.10
-  > +0.10

Flood extent impact

-  was wet, now dry
-  was dry, now wet

Title:
Modelled 5% AEP Peak Flood Level Impact

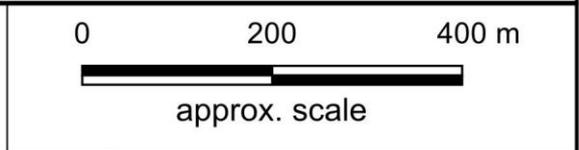



Figure: **11**

Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.




Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_011_250415_20y_h_impact.qgz

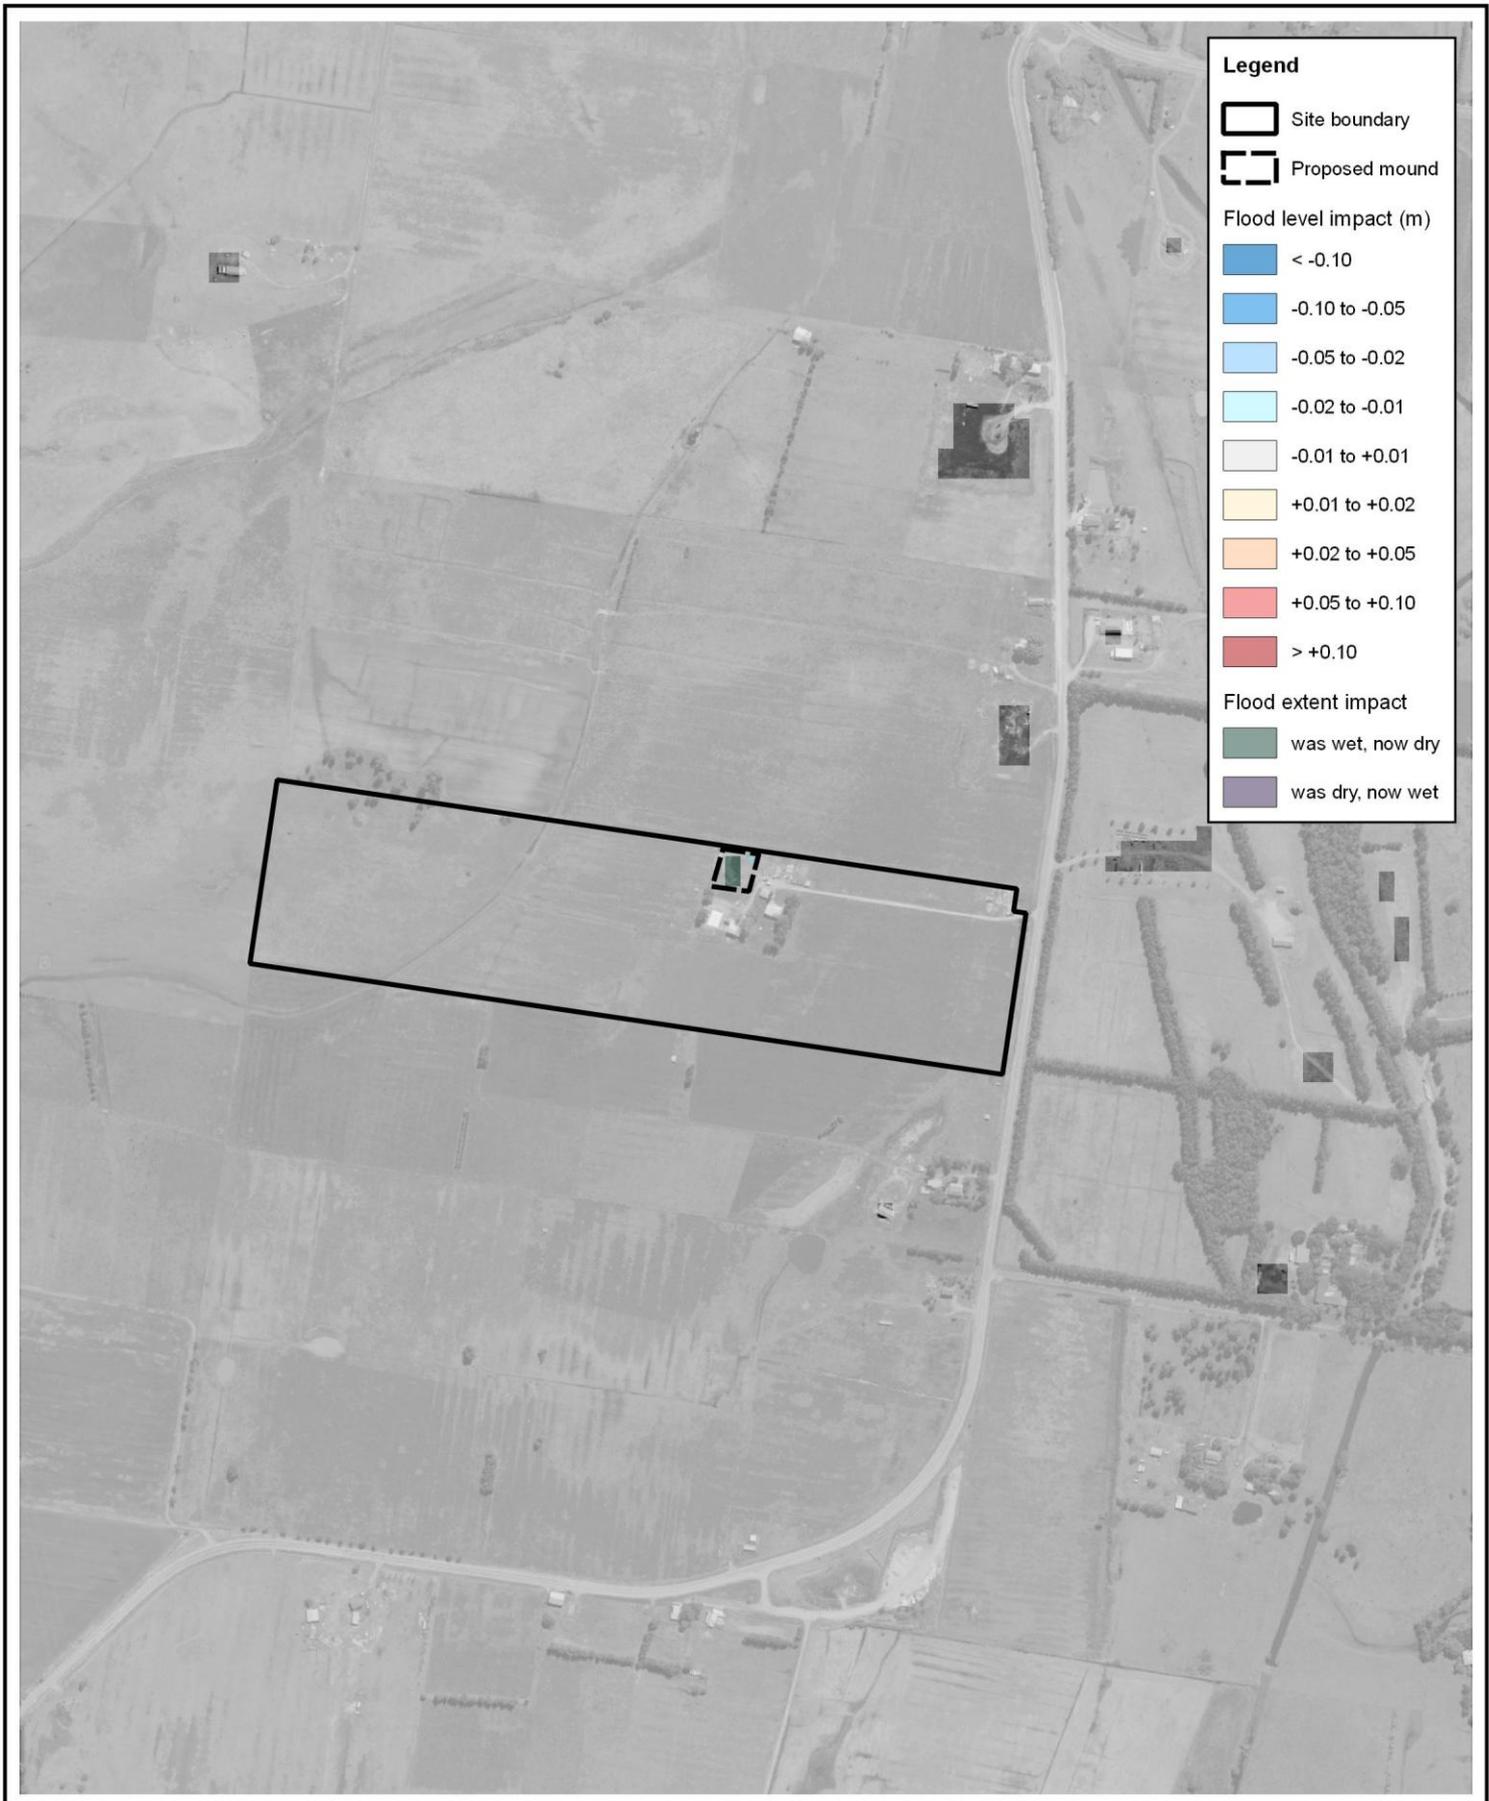

Legend

-  Site boundary
-  Proposed mound

Flood level impact (m)

-  <math>< -0.10</math>
-  -0.10 to -0.05
-  -0.05 to -0.02
-  -0.02 to -0.01
-  -0.01 to +0.01
-  +0.01 to +0.02
-  +0.02 to +0.05
-  +0.05 to +0.10
-  > +0.10

Flood extent impact

-  was wet, now dry
-  was dry, now wet

Title:
Modelled 1% AEP Peak Flood Level Impact

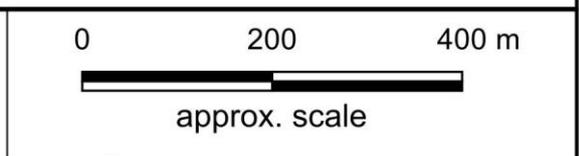



Figure: **12**

Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_012_250415_100y_h_impact.gqz



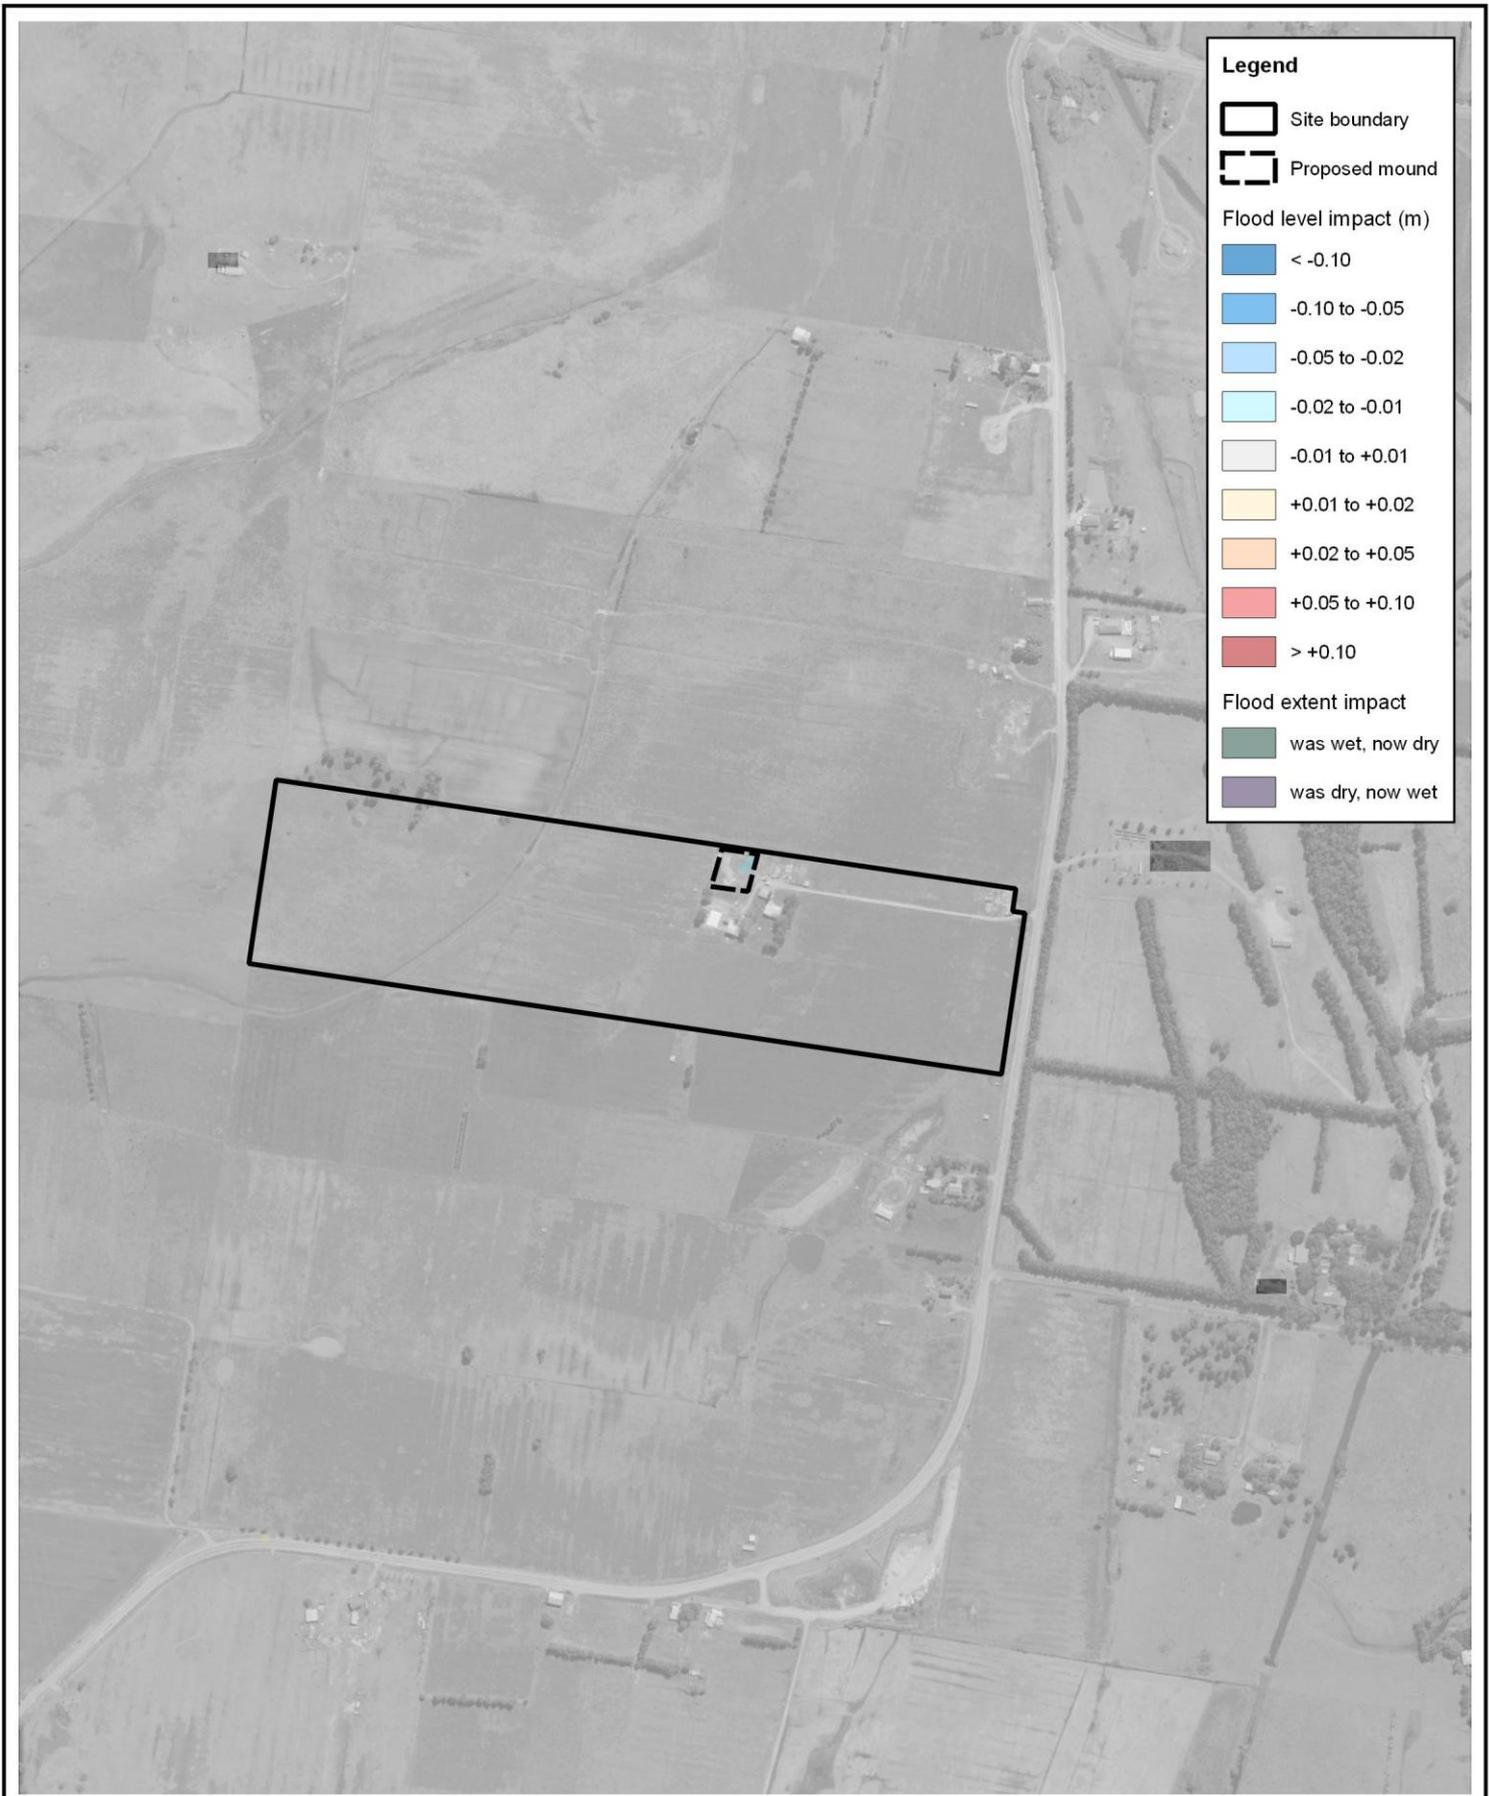Legend

- Site boundary
- Proposed mound

Flood level impact (m)

- < -0.10
- 0.10 to -0.05
- 0.05 to -0.02
- 0.02 to -0.01
- 0.01 to +0.01
- +0.01 to +0.02
- +0.02 to +0.05
- +0.05 to +0.10
- > +0.10

Flood extent impact

- was wet, now dry
- was dry, now wet

Title:
Modelled 0.5% AEP Peak Flood Level Impact


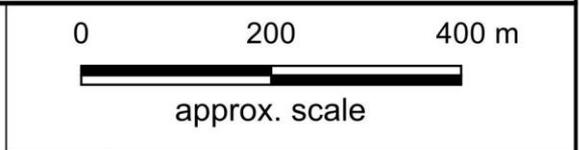


Figure: **13**
 Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_013_250415_200y_h_impact.gqz

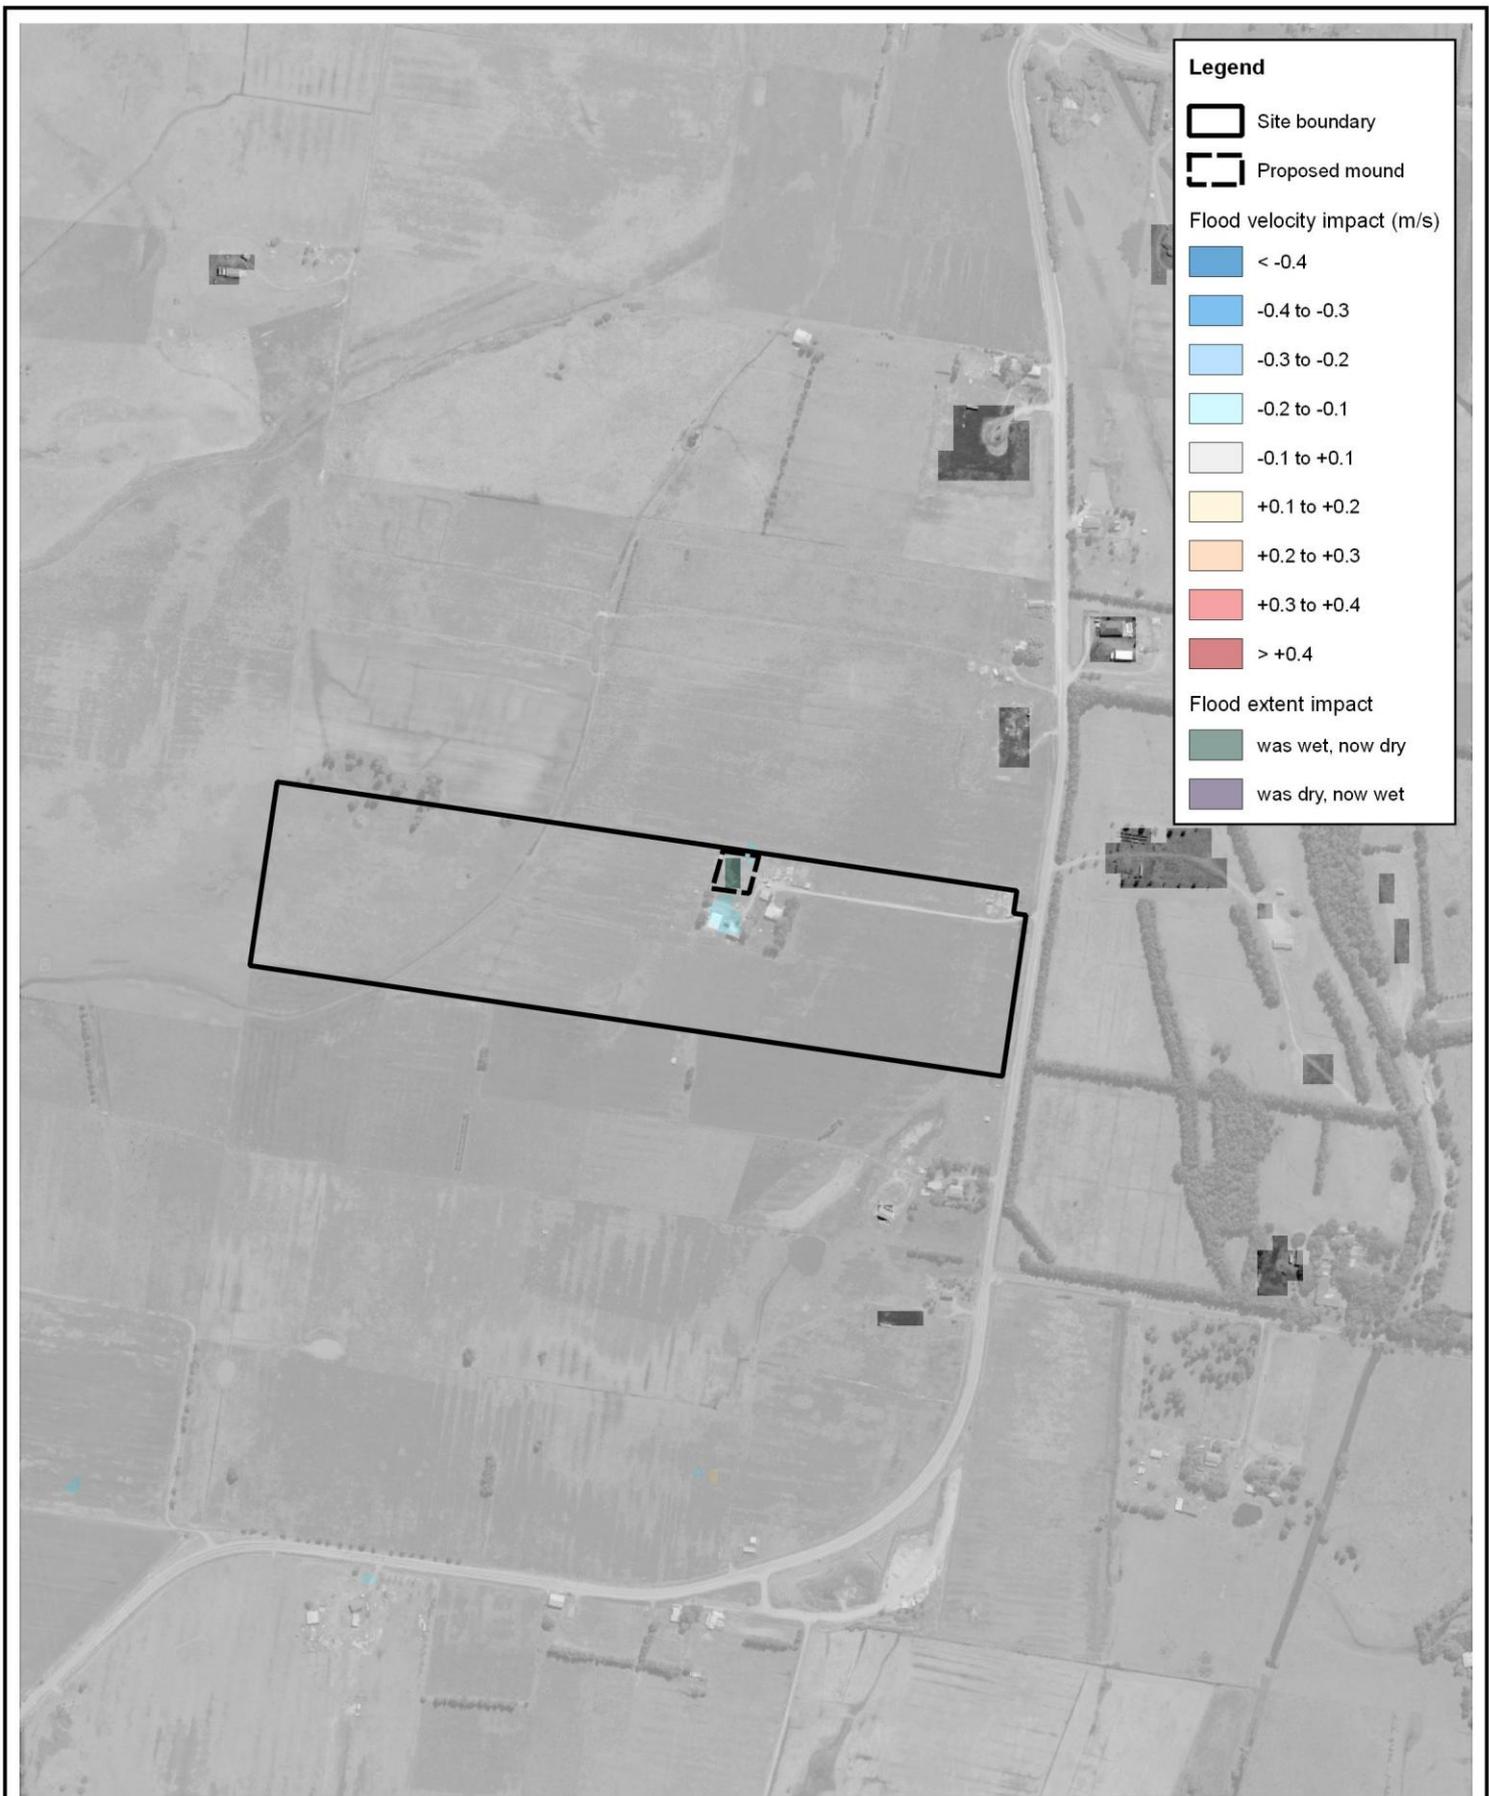

Legend

-  Site boundary
-  Proposed mound

Flood velocity impact (m/s)

-  <math>< -0.4</math>
-  -0.4 to -0.3
-  -0.3 to -0.2
-  -0.2 to -0.1
-  -0.1 to +0.1
-  +0.1 to +0.2
-  +0.2 to +0.3
-  +0.3 to +0.4
-  > +0.4

Flood extent impact

-  was wet, now dry
-  was dry, now wet

Title:
Modelled 5% AEP Peak Flood Velocity Impact


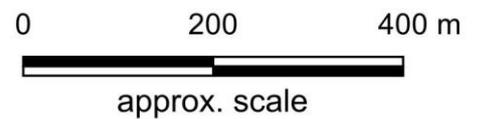


Figure: **14** Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Revision: **A**

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_014_250415_20y_v_impact.qgz



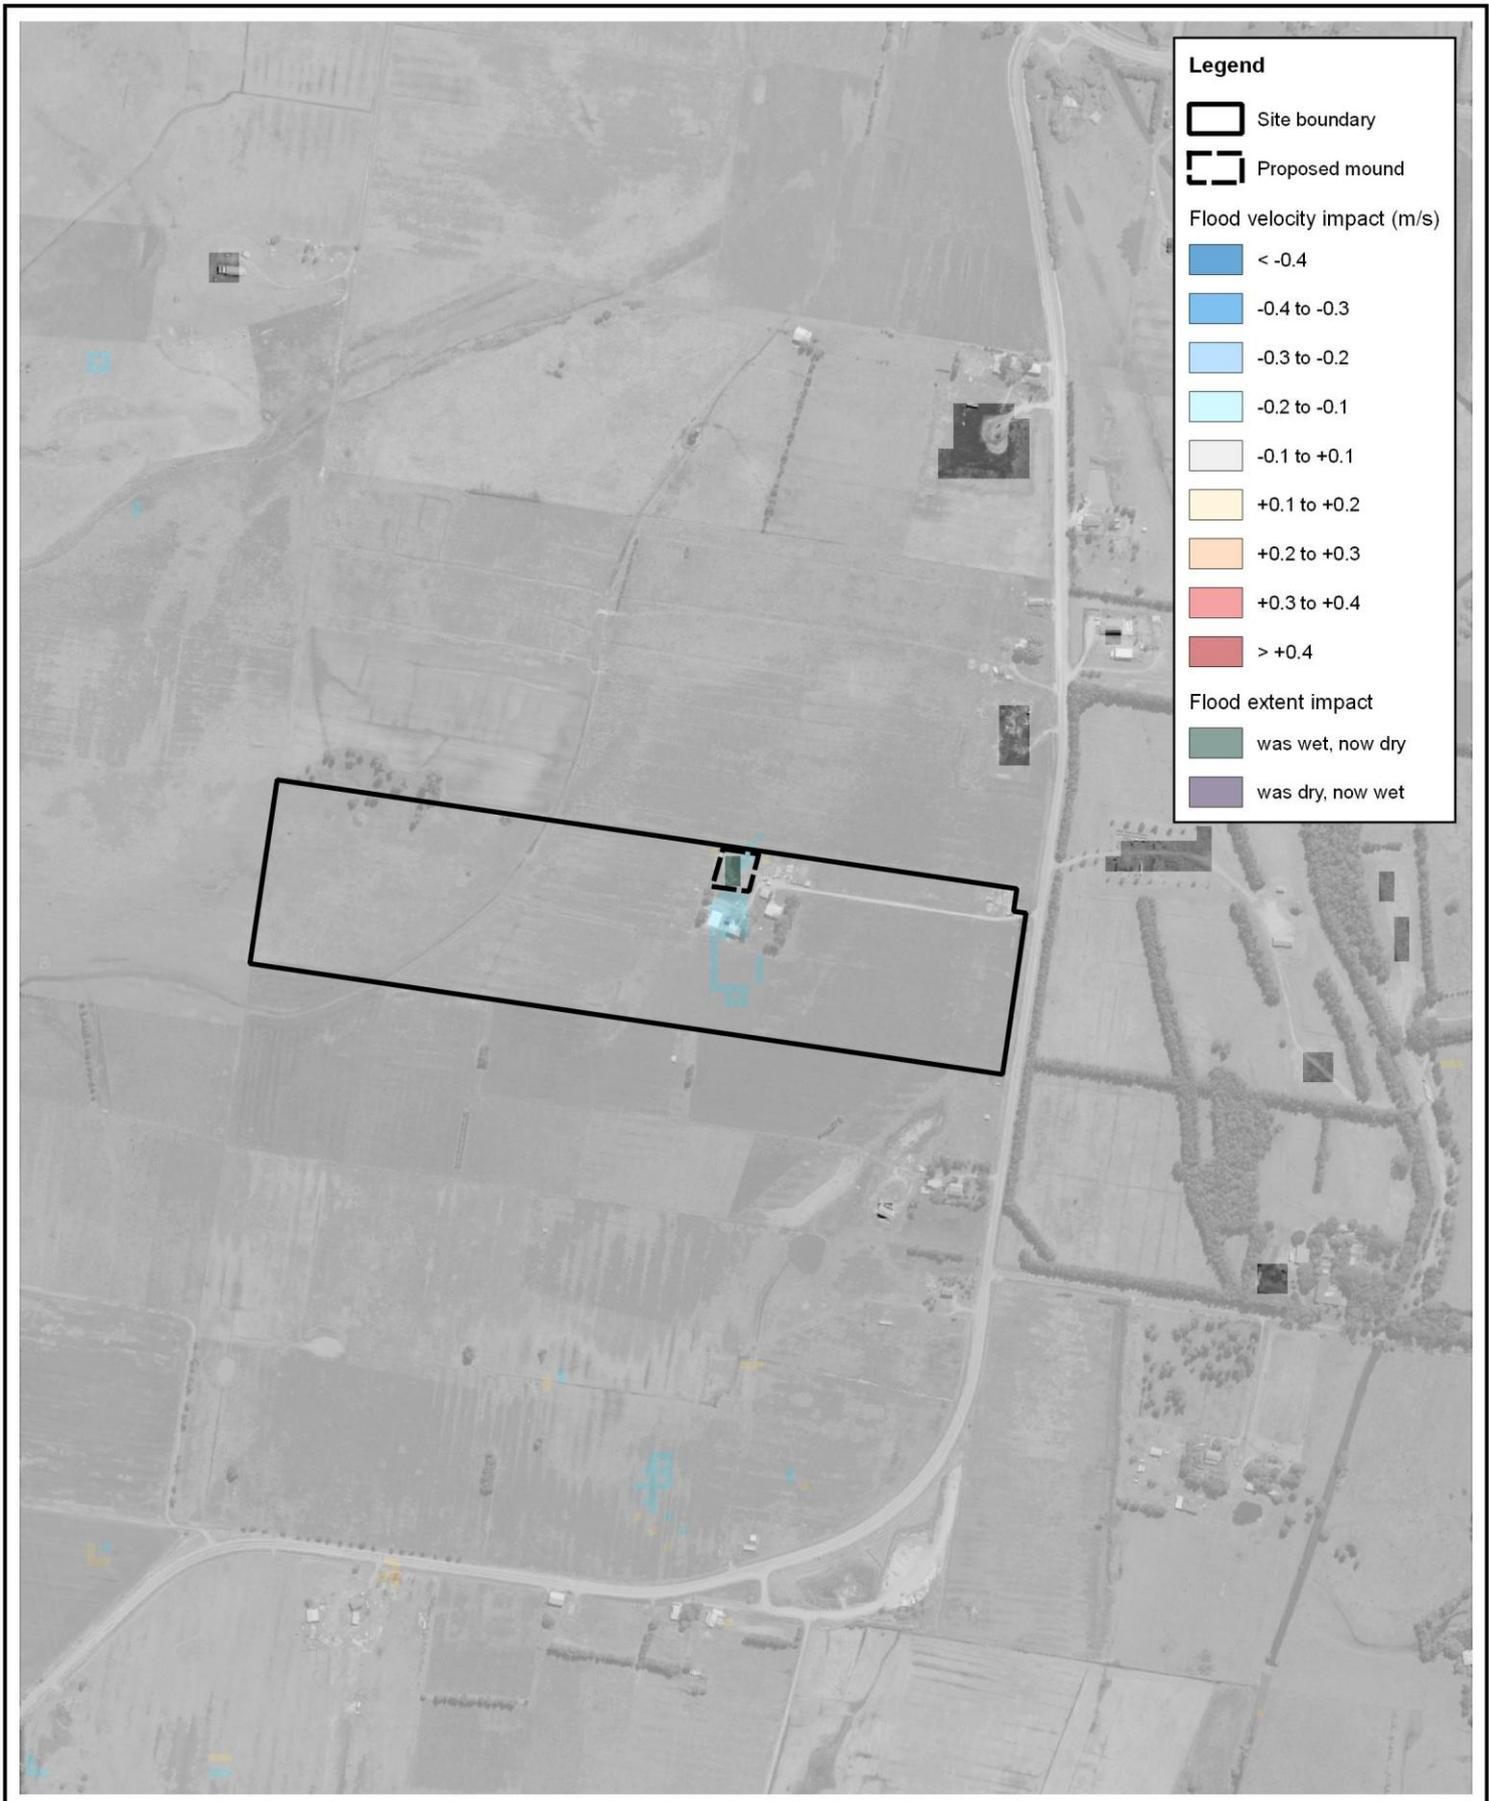

Title:
Modelled 1% AEP Peak Flood Velocity Impact


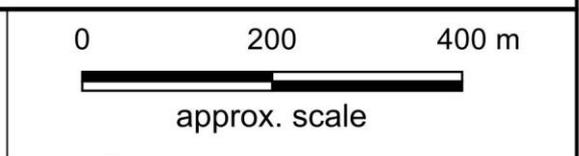


Figure: **15**
 Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_015_250415_100y_v_impact.gqz

Torrent
 CONSULTING
 www.torrentconsulting.com.au

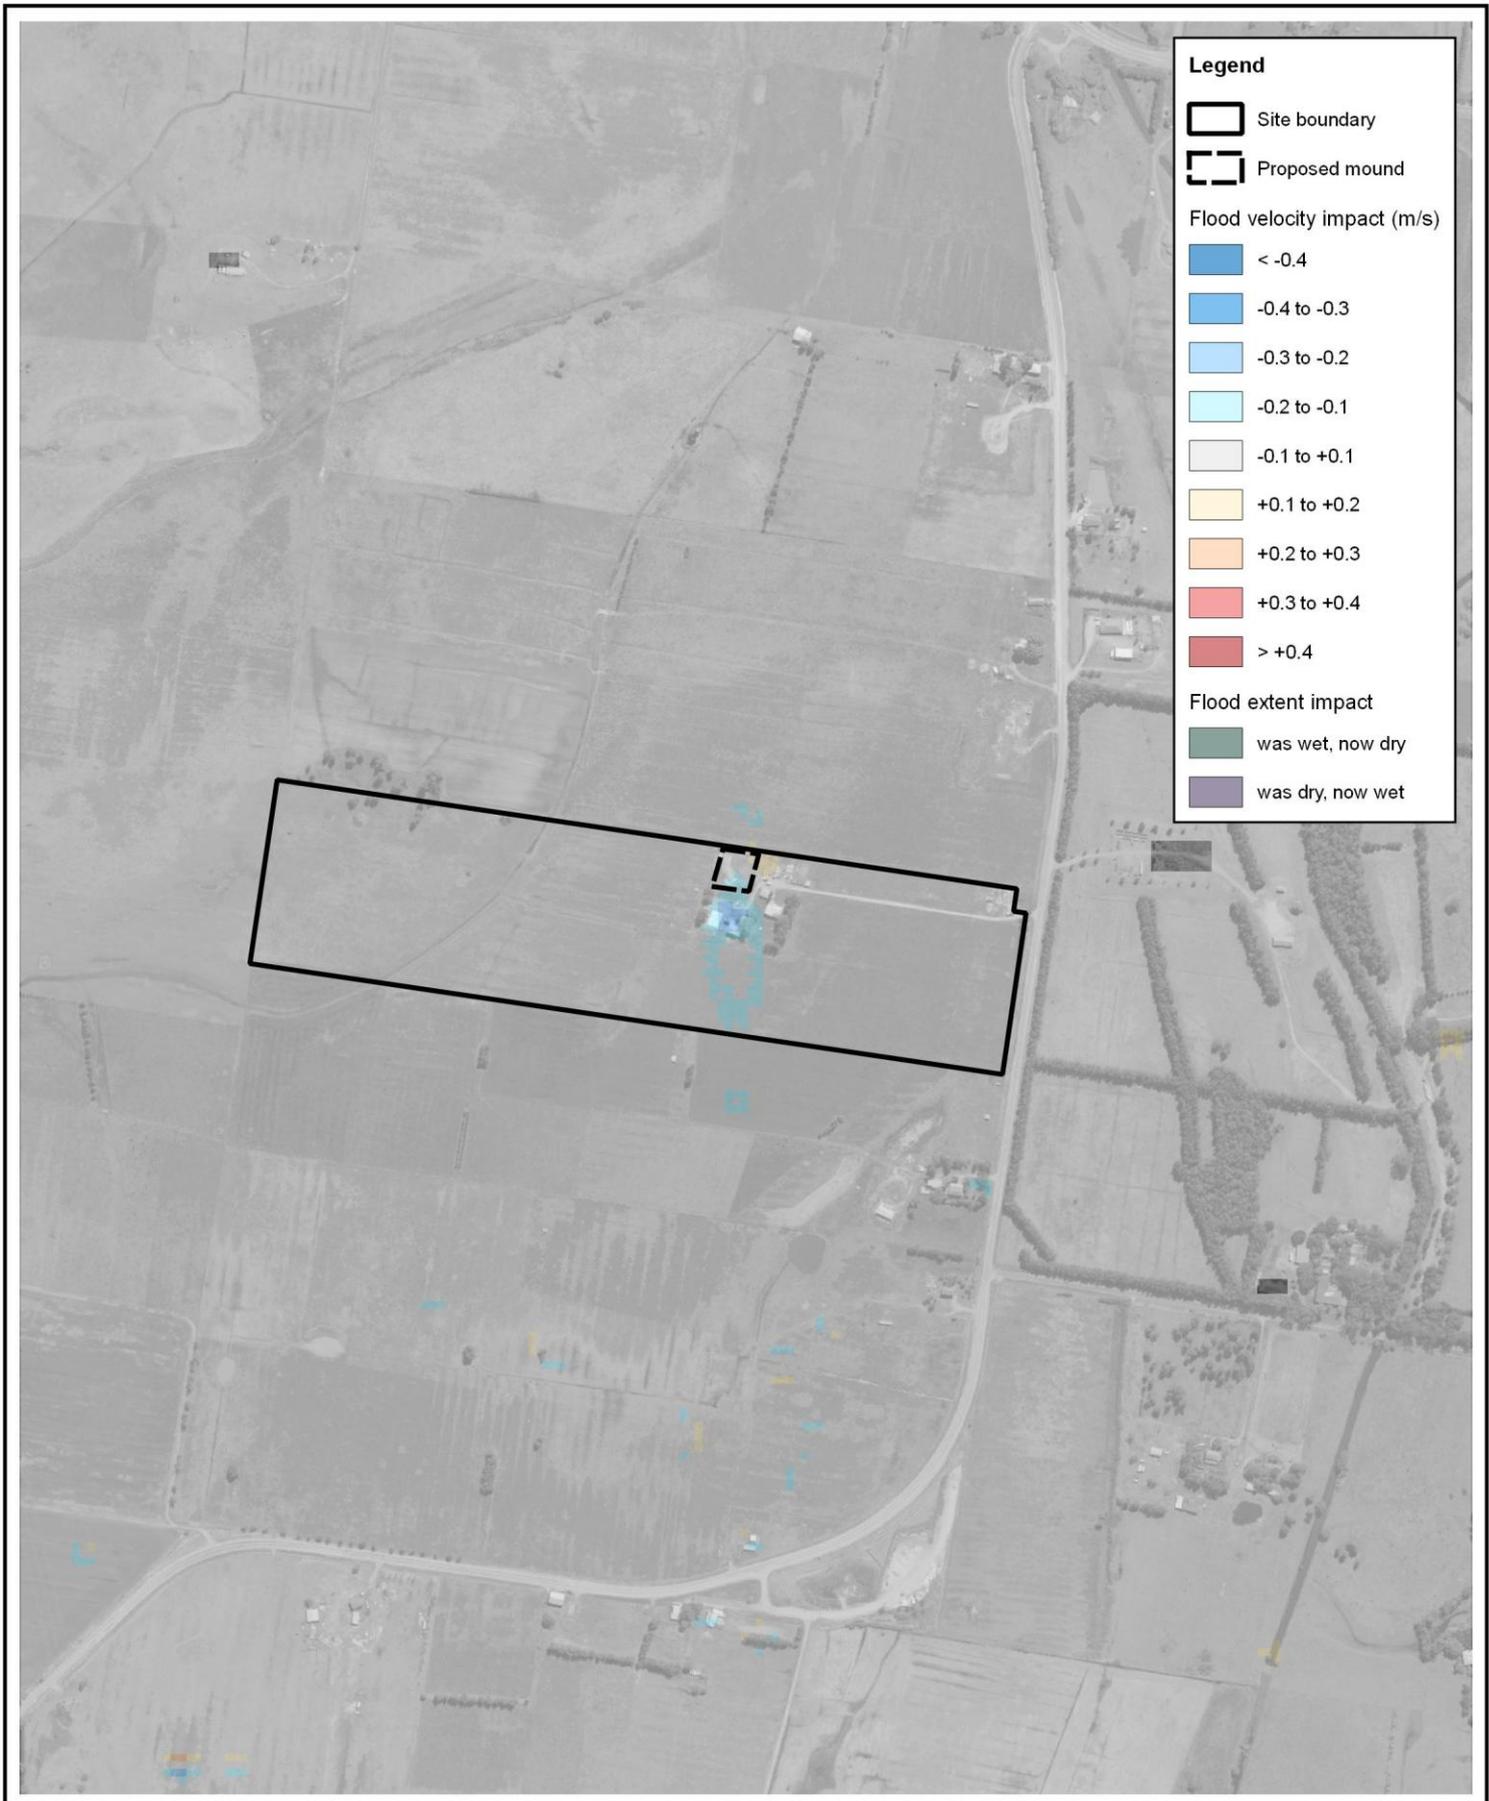

Legend

-  Site boundary
-  Proposed mound

Flood velocity impact (m/s)

-  <math>< -0.4</math>
-  -0.4 to -0.3
-  -0.3 to -0.2
-  -0.2 to -0.1
-  -0.1 to +0.1
-  +0.1 to +0.2
-  +0.2 to +0.3
-  +0.3 to +0.4
-  > +0.4

Flood extent impact

-  was wet, now dry
-  was dry, now wet

Title:
Modelled 0.5% AEP Peak Flood Velocity Impact


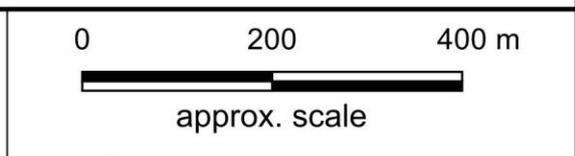


Figure: **16**
 Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_016_250415_200y_v_impact.gqz

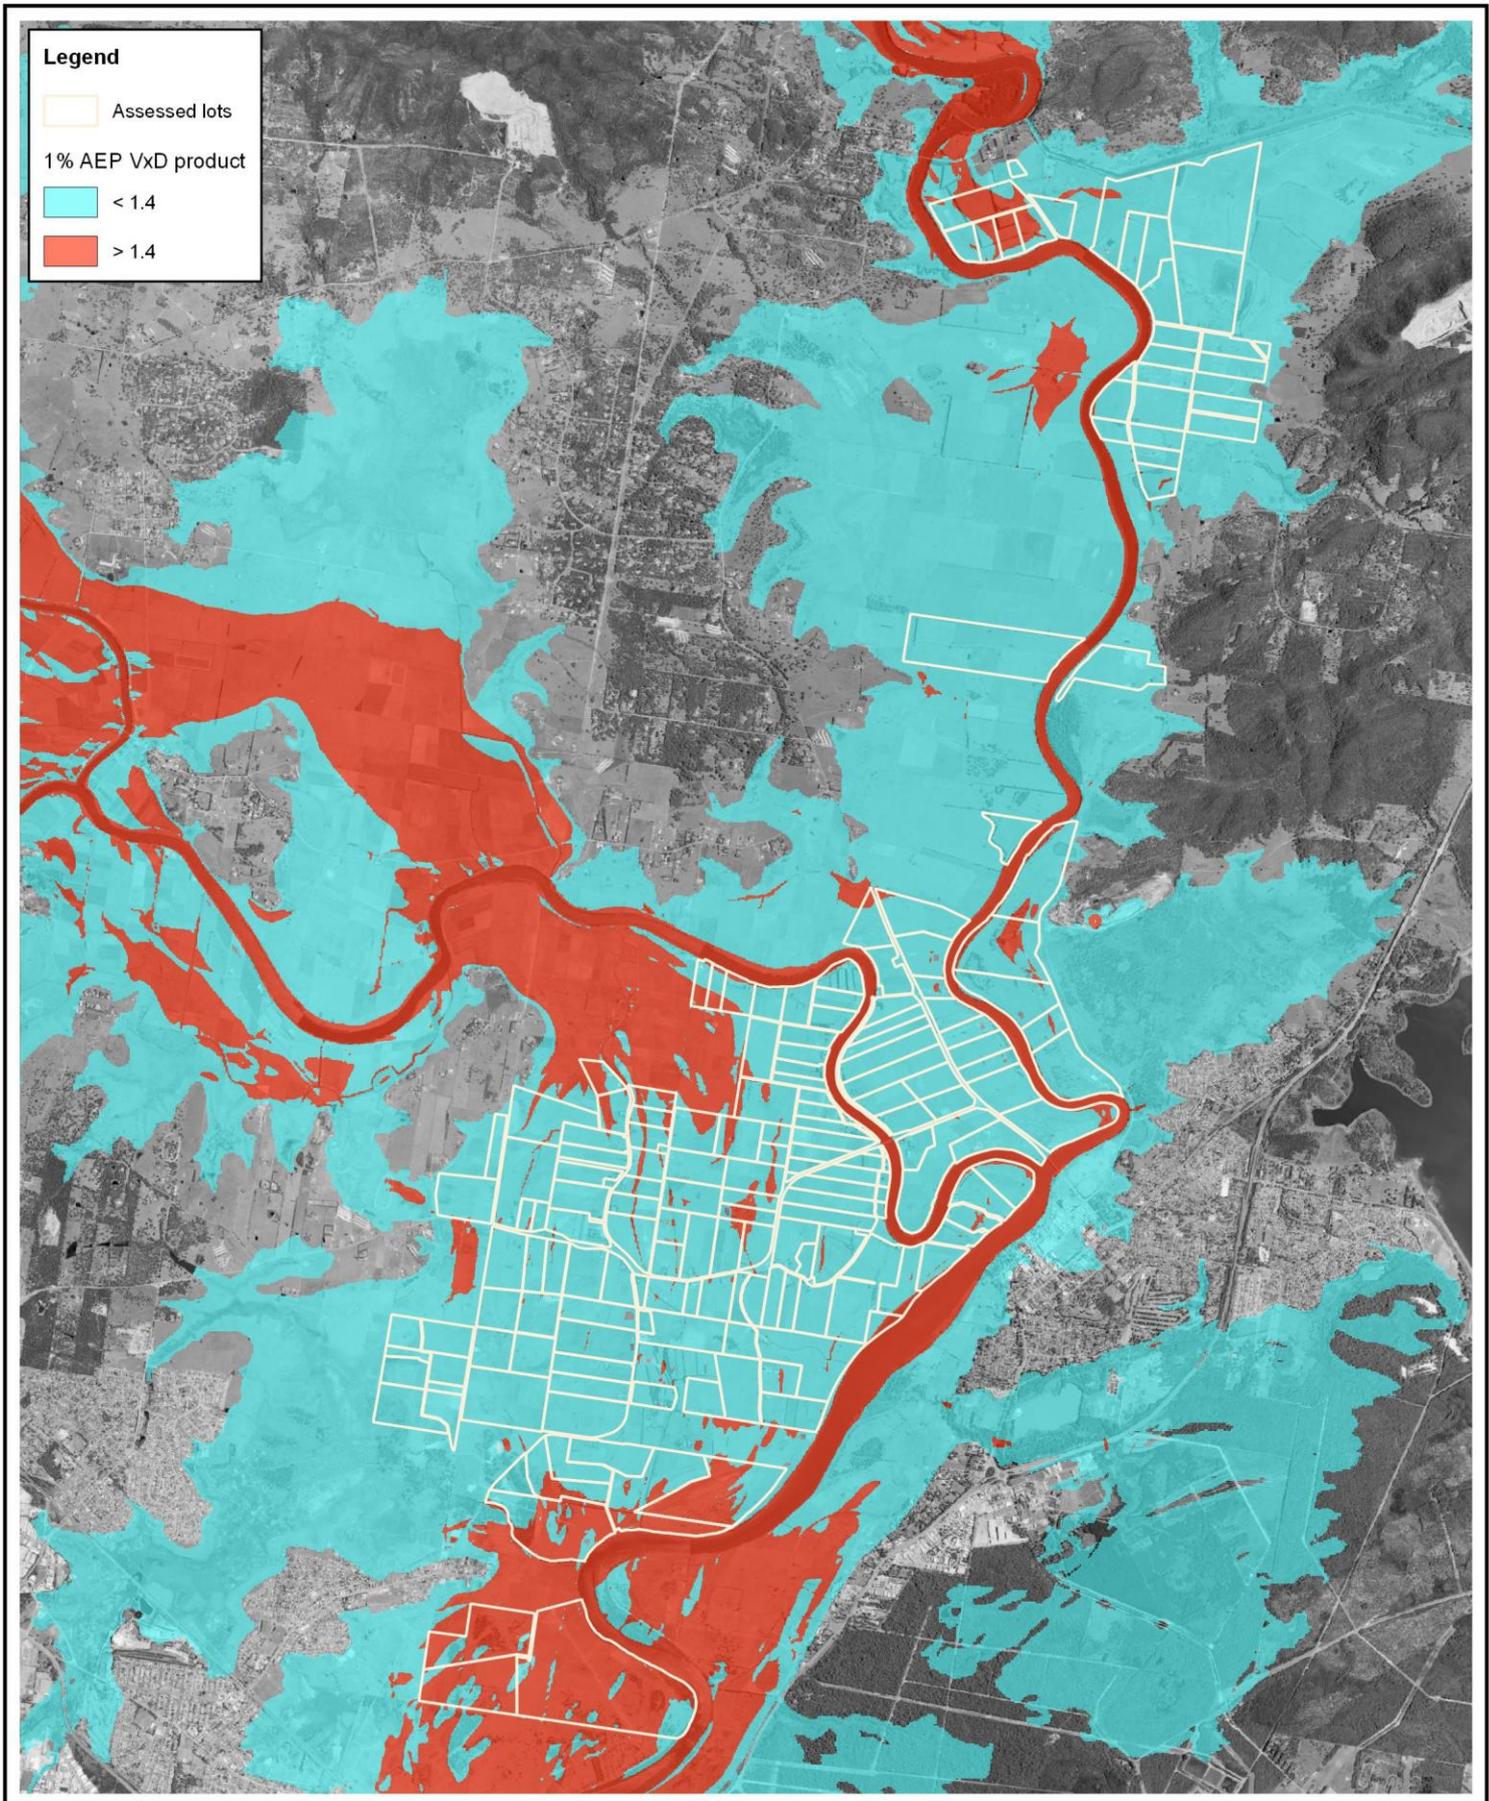

Title:
Lots Considered for Cumulative Development Impact Assessment Downstream of Green Rocks


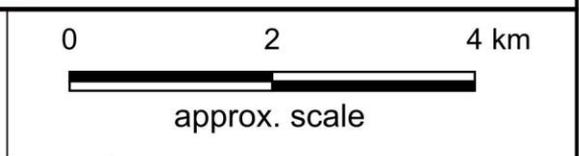


Figure: **17** Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.

Revision: **A**

Torrent
 CONSULTING
 www.torrentconsulting.com.au

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_017_250415_CumDev_Lots_1p4.ggz

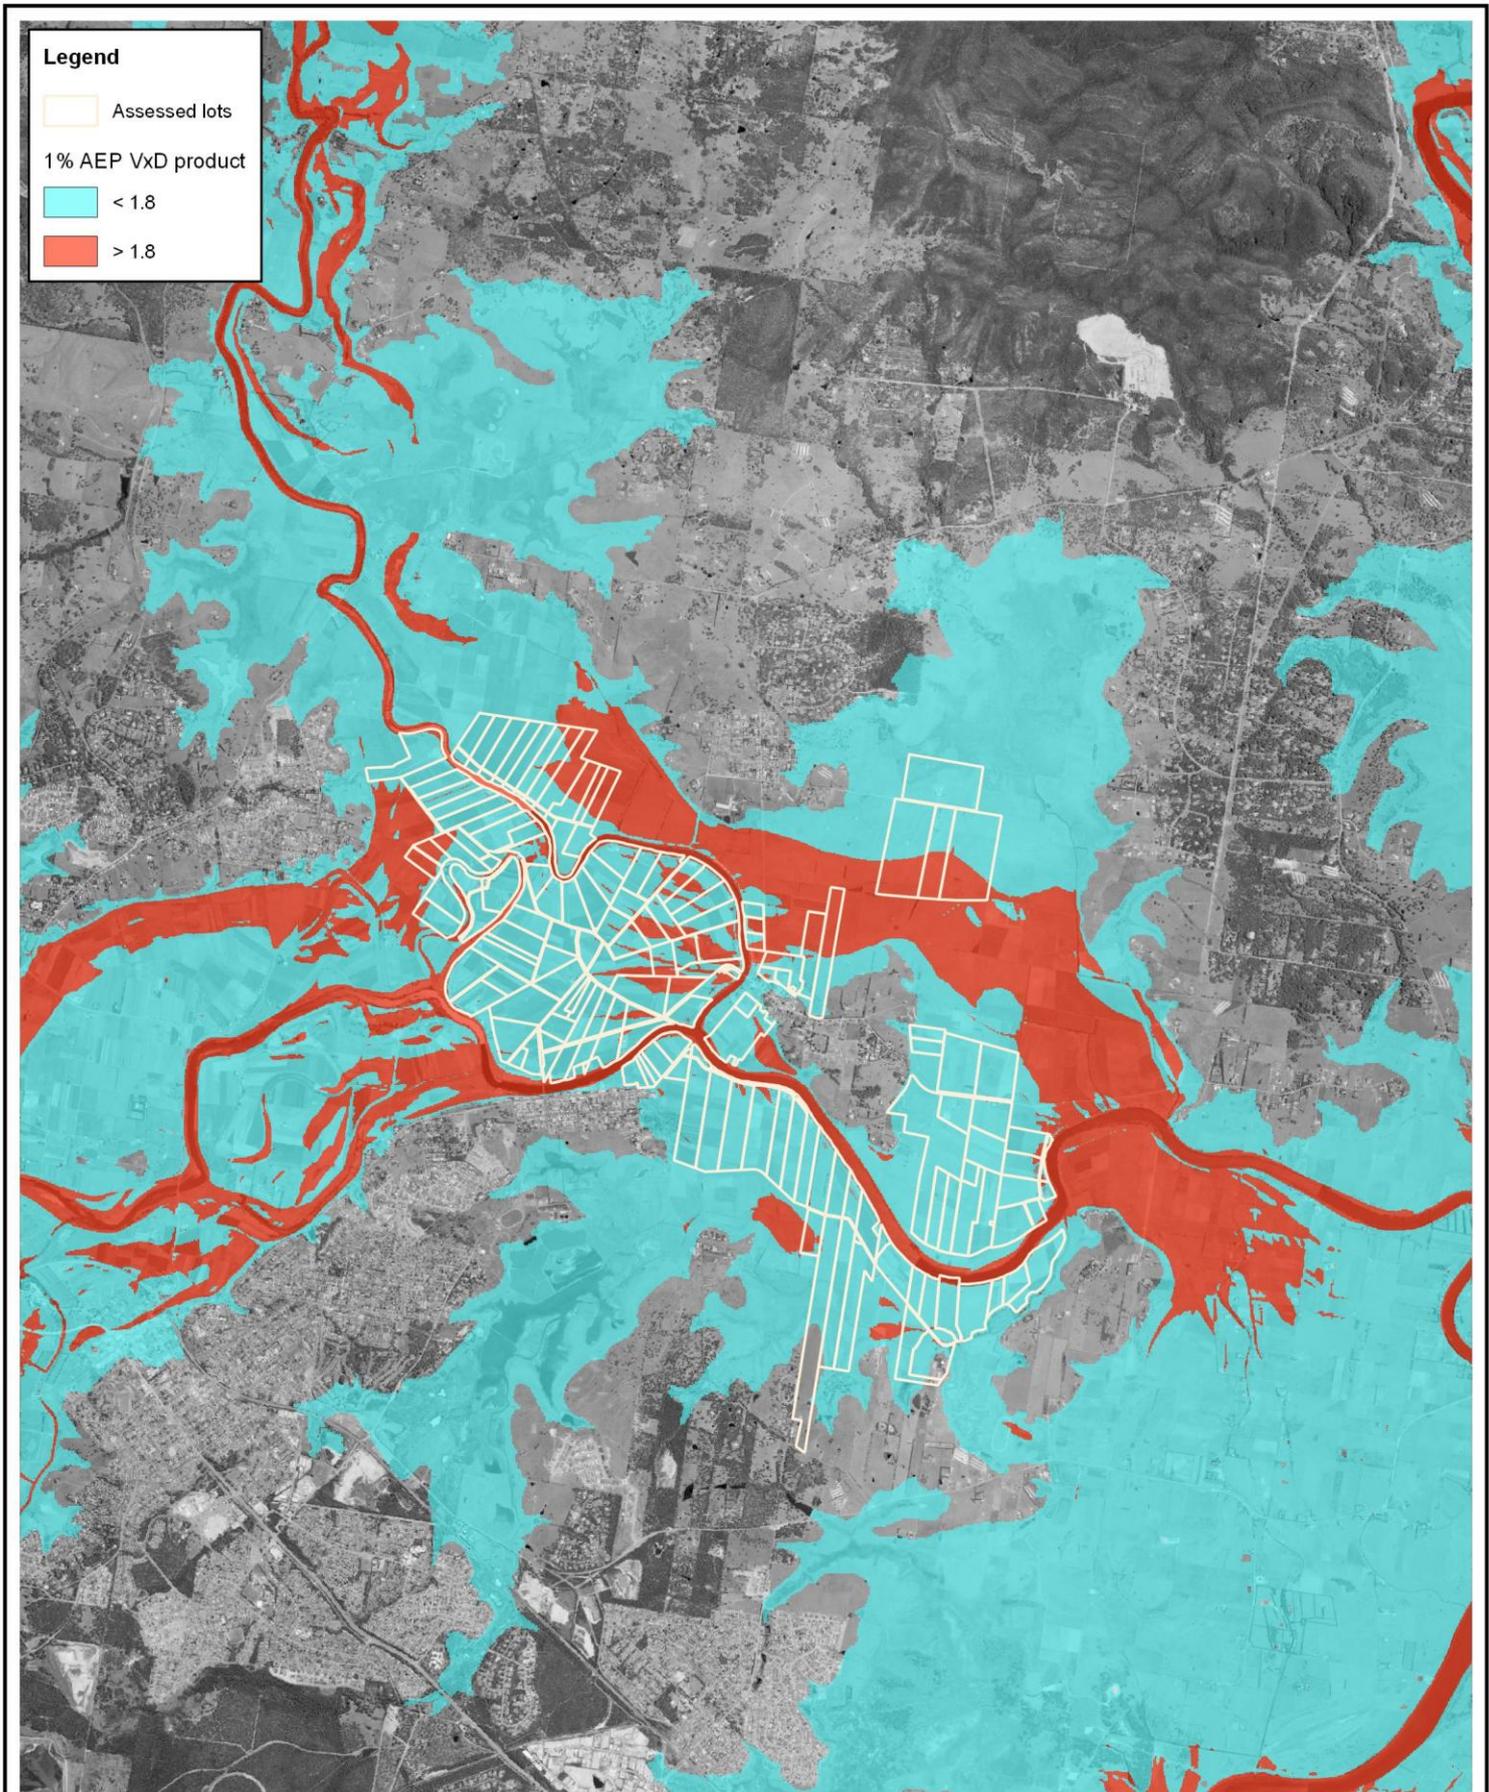

Legend

- Assessed lots
- 1% AEP VxD product**
- < 1.8
- > 1.8

Title:
Lots Considered for Cumulative Development Impact Assessment Upstream of Green Rocks


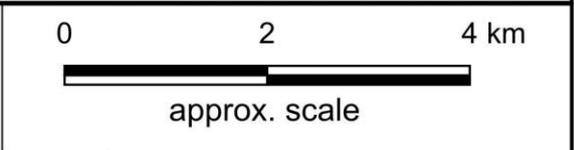


Figure: **18** *Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.*

Revision: **A**

www.torrentconsulting.com.au

Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_018_250415_CumDev_Lots_1p8.qgz

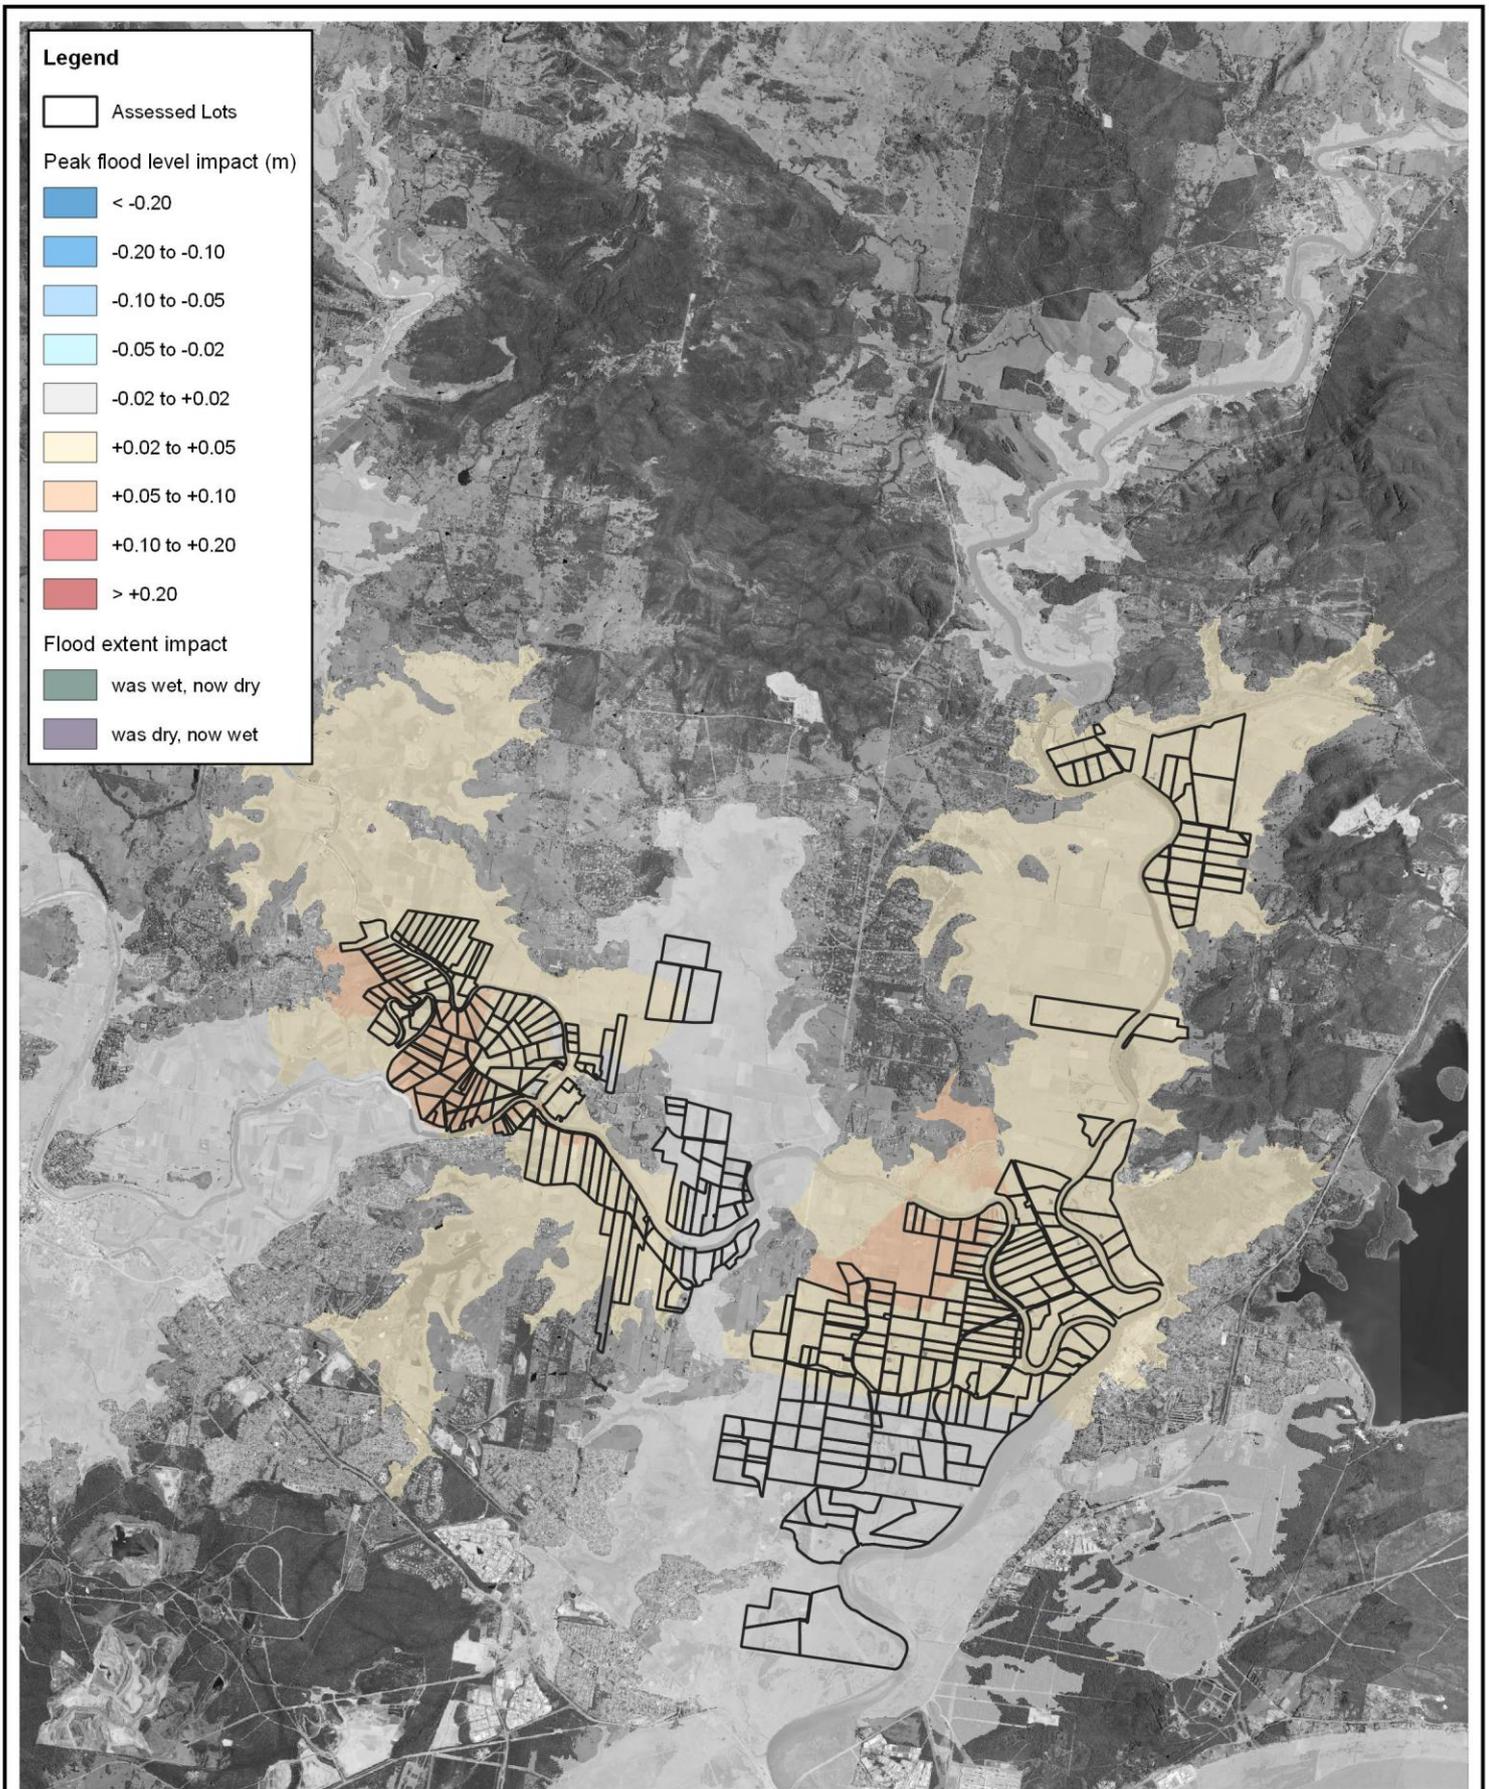

Title:
**Modelled 1% AEP Peak Flood Level Impact
 Cumulative Development Assessment**


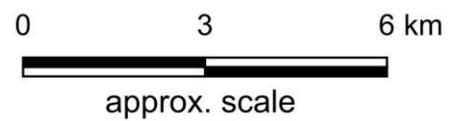


Figure: **19** *Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.*

Revision: **A**



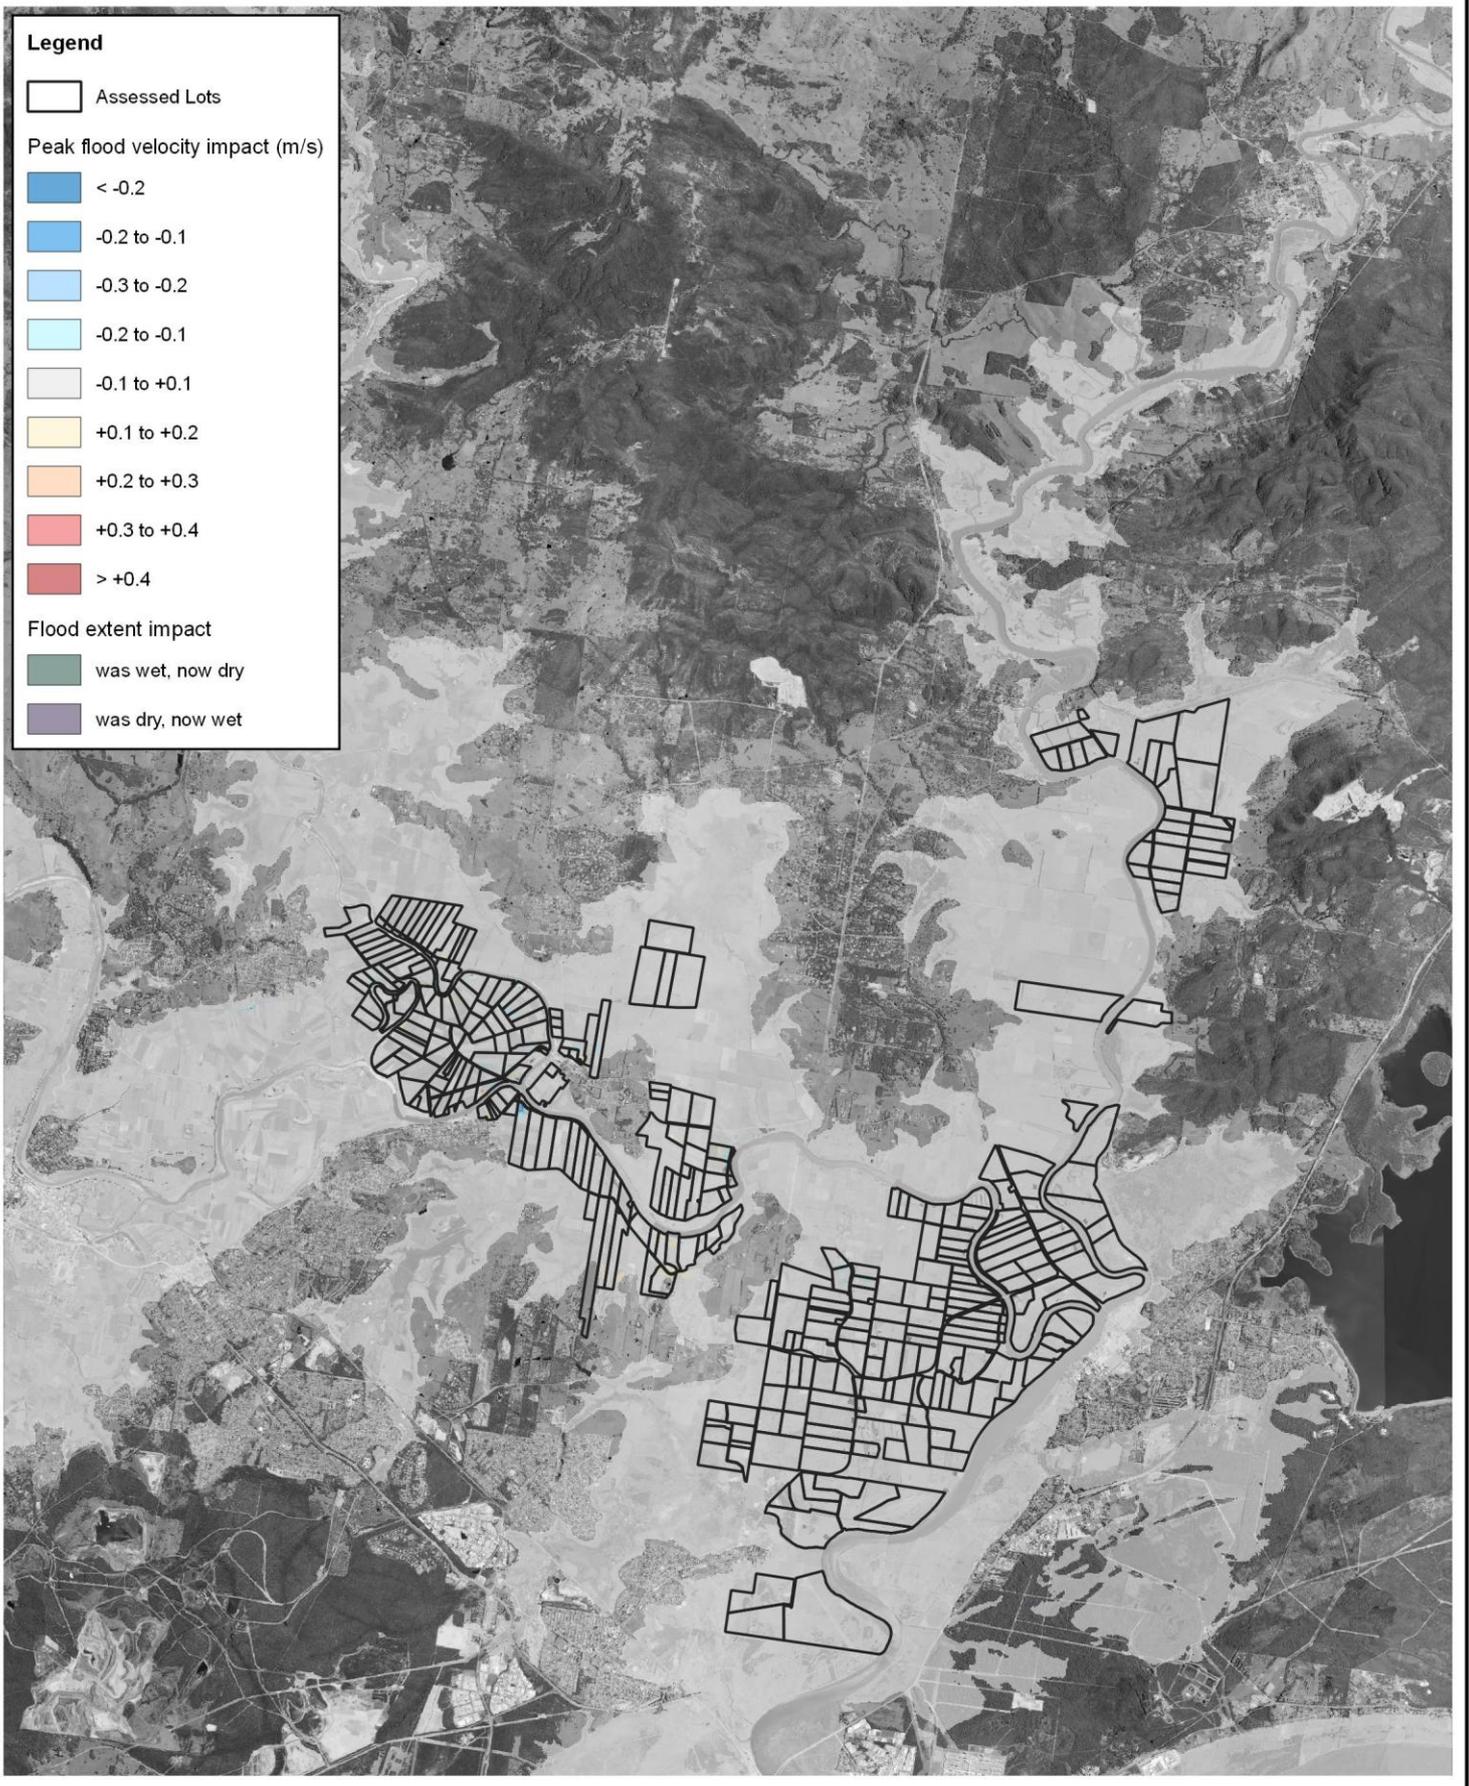

Title:
**Modelled 1% AEP Peak Flood Velocity Impact
 Cumulative Development Assessment**

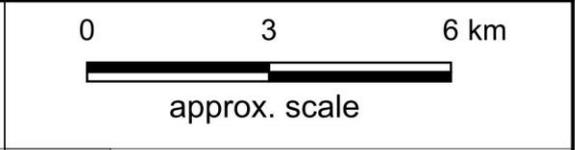


Figure: **20**
 Revision: **A**

Information shown on this figure is compiled from numerous sources and may not be complete or accurate. Torrent Consulting cannot be held responsible for the misuse or misinterpretation of any information and offers no warranty guarantees or representations of any kind in connection to its accuracy or completeness. Torrent Consulting accepts no liability for any loss, damage or inconvenience caused as a result of reliance on the information.



Filepath: Z:\Projects\T2698_Woodberry_Rd\GIS\T2698_020_250415_100y_CumDev_v_impact.qgz